HLG-120H series





- Universal AC input / Full range (up to 305VAC)
- Built-in active PFC function
- * High efficiency up to 93.5%
- Protections: Short circuit / Over current / Over voltage / Over temperature
- · Cooling by free air convection
- OCP point adjustable through output cable or internal potentiometer
- IP67 / IP65 design for indoor or outdoor installations
- Three in one dimming function (1~10Vdc or PWM signal or resistance)
- Suitable for LED lighting and street lighting applications
- Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet locations
- 5 years warranty (Note.10)























HLG-120H-12 A

Blank: IP67 rated. Cable for I/O connection.

A: IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.

 $B: IP67\ rated.\ Constant\ current\ level\ adjustable\ through\ output\ cable\ with\ 1\sim10Vdc\ or\ 10V\ PWM\ signal\ or\ resistance.$

D (option, safety pending): IP67 rated. Timer dimming function, contact MEAN WELL for details.


SPECIFICATION

					1	1		1						
MODEL		HLG-120H-12	HLG-120H-15	HLG-120H-20	HLG-120H-24	HLG-120H-30	HLG-120H-36	HLG-120H-42	HLG-120H-48	HLG-120H-54				
	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54 V				
	CONSTANT CURRENT REGION Note.4	6 ~12V	7.5 ~ 15V	10 ~ 20V	12 ~ 24V	15 ~ 30V	18 ~ 36V	21 ~ 42V	24 ~ 48V	27 ~ 54V				
	RATED CURRENT	10A	8A	6A	5A	4A	3.4A	2.9A	2.5A	2.3A				
	RATED POWER	120W	120W	120W	120W	120W	122.4W	121.8W	120W	124.2W				
	RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p				
	VOLTAGE ADJ. RANGE Note.6		13.5 ~ 17V	17 ~ 22V	22 ~ 27V	27 ~ 33V	33 ~ 40V	38 ~ 46V	43 ~ 53V	49 ~ 58V				
OUTPUT				ootentiometer /			1		1.0	1.0				
	CURRENT ADJ. RANGE	5 ~ 10A	4 ~ 8A	3 ~ 6A	2.5 ~ 5A	2 ~ 4A	1.7 ~ 3.4A	1.4 ~ 2.9A	1.2 ~ 2.5A	1.1 ~ 2.3A				
	VOLTAGE TOLERANCE Note.3	±2.5%	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%				
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%				
	LOAD REGULATION	±2.0%	±1.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%				
		1200ms,50ms												
	,	1200ms,50ms/115VAC 500ms,50ms/230VAC at full load; B type 1200ms,200ms/115VAC 500ms,200ms/230VAC at 95% to 12ms at full load 230VAC / 115VAC												
	HOLD UP TIME (Typ.)													
		90 ~ 305VAC 127 ~ 431VDC												
	FREQUENCY RANGE	47 ~ 63Hz												
	POWER FACTOR (Typ.)	PF>0.98/115VAC, PF>0.95/230VAC, PF>0.93/277VAC at full load (Please refer to "Power Factor Characteristic" curve)												
NPUT		THD< 20% when output loading ≥50% at 115VAC/230VAC input and output loading ≥75% at 277VAC input												
	EFFICIENCY (Typ.)	92% 92% 93% 93% 93% 93% 93.5% 93.5%												
	AC CURRENT (Typ.)	1.4A / 115VAC 0.6A / 230VAC 0.55A / 277VAC												
	INRUSH CURRENT (Typ.)	COLD START 60A(twidth=375 μ s measured at 50% Ipeak) at 230VAC												
	LEAKAGE CURRENT	<0.75mA/277VAC												
	OVED CURRENT	95 ~ 108%												
	OVER CURRENT	Protection type: Constant current limiting, recovers automatically after fault condition is removed												
	SHORT CIRCUIT	Constant current limiting, recovers automatically after fault condition is removed												
ROTECTION	OVER VOLTAGE	14 ~ 17V	18 ~ 21V	23 ~ 27V	28 ~ 34V	34 ~ 38V	41 ~ 46V	47 ~ 53V	54 ~ 63V	59 ~ 65V				
		Protection type: Shut down o/p voltage with auto-recovery or re-power on to recovery												
	OVER TEMPERATURE	Shut down o/p voltage, recovers automatically after temperature goes down												
	WORKING TEMP.	-40 ~ +70°C (Refer to "Derating Curve")												
	WORKING HUMIDITY	20 ~ 95% RH non-condensing												
NVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C,		<u> </u>										
N VIII CHIII LINI	TEMP. COEFFICIENT	,												
	VIBRATION	±0.03%/°C (0~50°C)												
	VIDIATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes UL8750, CSA C22.2 No. 250.0-08, ENEC, TUV EN61347-1, EN61347-2-13 independent IP65 or IP67, J61347-1,												
	SAFETY STANDARDS Note.7													
AFFTY C	MUTUOTAND VOLTAGE	J61347-2-13 approved; design refer to UL60950-1, TUV EN60950-1												
AFETY &	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC												
MC	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH												
	EMC EMISSION	Compliance to EN55015, EN55022 (CISPR22) Class B, EN61000-3-2 Class C (≥50% load) ; EN61000-3-3												
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547, EN55024, light industry level (surge 4KV), criteria A												
	MTBF	192.2K hrs min. MIL-HDBK-217F (25°C)												
THERS	DIMENSION	220*68*38.8mm (L*W*H)												
	PACKING	1.12Kg; 12pcs	s/14.4Kg/0.8Cl	JFT										
ЮТЕ	1.12Kg; 12pcs/14.4Kg/0.8CUFT 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. Please refer to "DRIVING METHODS OF LED MODULE". 5. Derating may be needed under low input voltages. Please check the static characteristics for more details. 6. A type only. 7. Safety and EMC design refer to EN60598-1, CNS15233, GB7000.1, FCC part18. 8. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time. 9. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.													


10. Refer to warranty statement.

11. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED power supply can only be used behind a switch without permanently



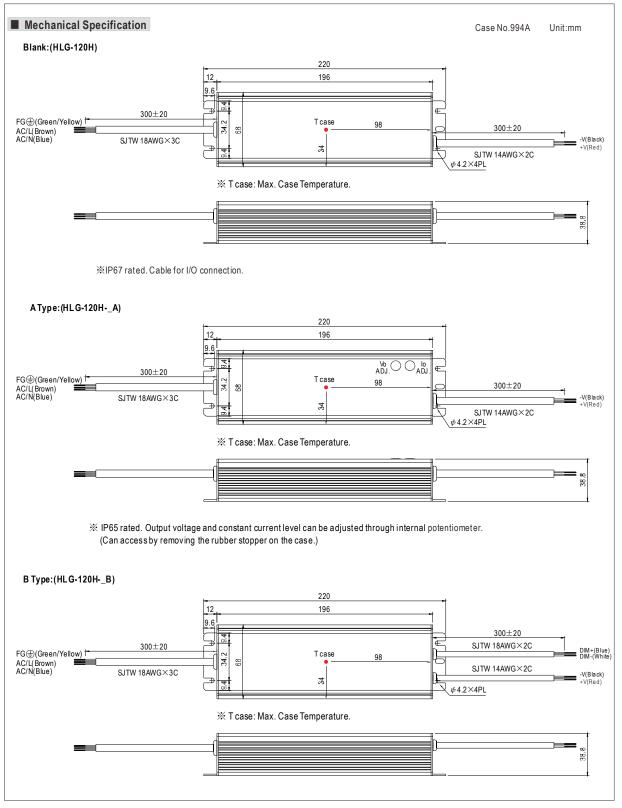




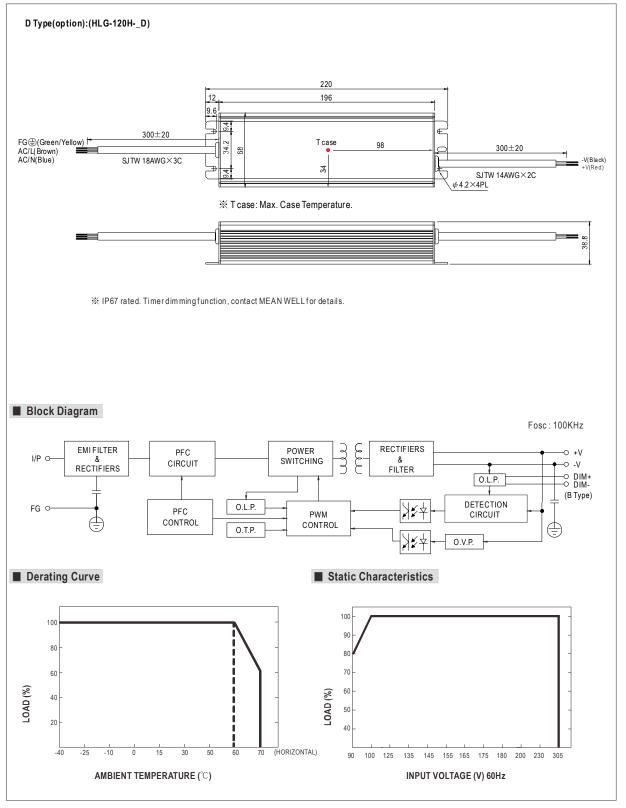




■ Power Factor Characteristic

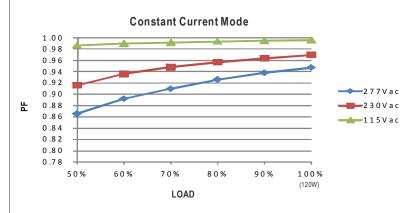

■ EFFICIENCY vs LOAD (48V Model)

HLG-120H series possess superior working efficiency that up to 93.5% can be reached in field applications.

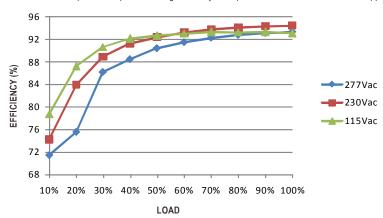


■ DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs.

Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).

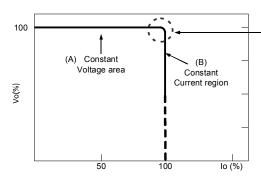

depends on the configuration of the end systems.


In the constant current region, the highest voltage at the output of the driver

Should there be any compatibility issues, please contact MEAN WELL.

Typical LED power supply I-V curve



■ DIMMING OPERATION (for B-type only)



- $\frak{\%}$ Please DO NOT connect "DI M-" to "-V".
- $\ensuremath{\,\times\,} \ensuremath{\,\text{Reference}} \ensuremath{\,\text{resistance}} \ensuremath{\,\text{value}} \ensuremath{\,\text{for output current adjustment}} \ensuremath{\,\text{(Typical)}}$

Resistance value	Single driver	10K Ω	20K Ω	30K Ω	40K Ω	50K Ω	60K Ω	70K Ω	80K Ω	90ΚΩ	100K Ω	OPEN
	Multiple drivers (N=driver quantity for synchronized dimming oper ation)	10K Ω /N	20K Ω/N	30K Ω/N	40K Ω/N	50K Ω/N	60K Ω/N	70K Ω /N	80K Ω /N	90K Ω /N	100KΩ/N	
Percentage of rated current		10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

※ 1 ~ 10V dimming function for output current adjustment (Typical)


Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

¾ 10V PWM signal for output current adjustment (Typical): Frequency range: 100Hz ~ 3KHz

Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

[※]Using the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.

Dimming connection diagram for turning the lighting fixture ON/OFF:

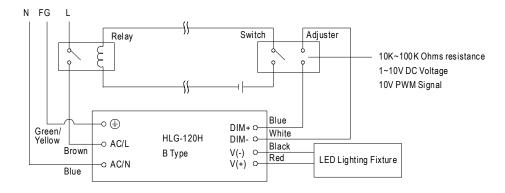

Using a switch and relay can turn ON/OFF the lighting fixture.

- 1. Output constant current level can be adjusted through output cable by connecting a resistance or 1~10Vdc or 10V PWM signal between DIM+ and DIM-
- 2.The LED lighting fixture can be turned ON/OFF by the switch.

XDirect connecting to LEDs is suggested, but is not suitable for using additional drivers.



