
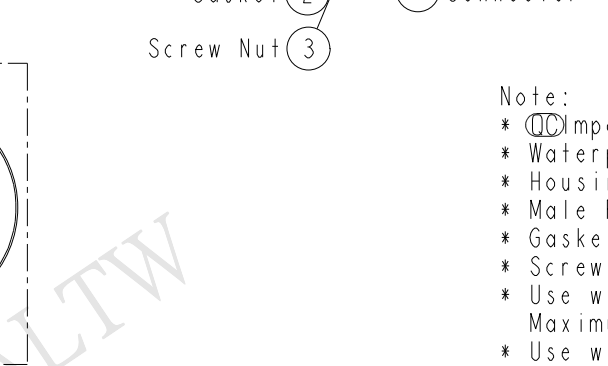
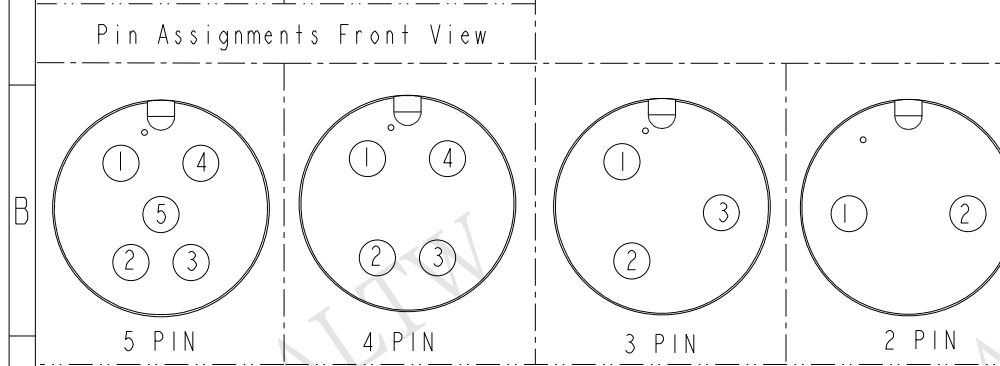
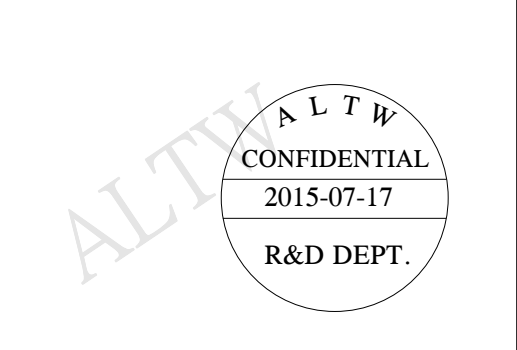
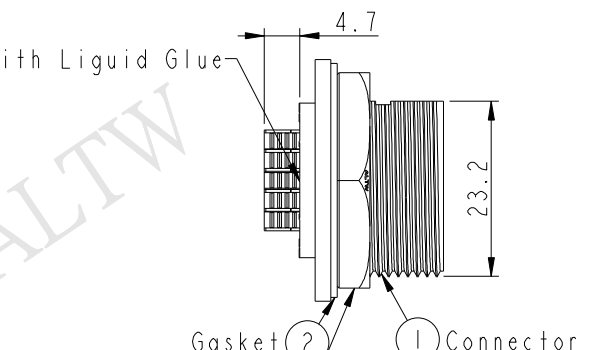
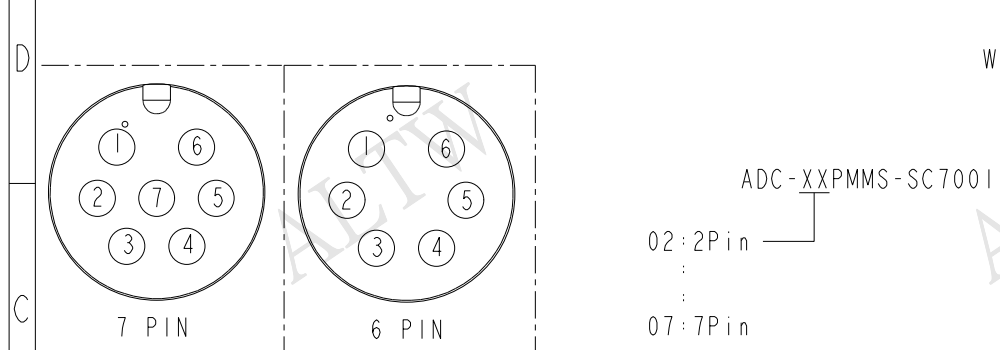
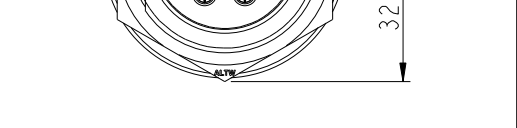
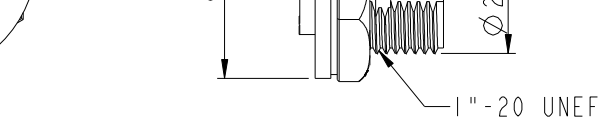


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION

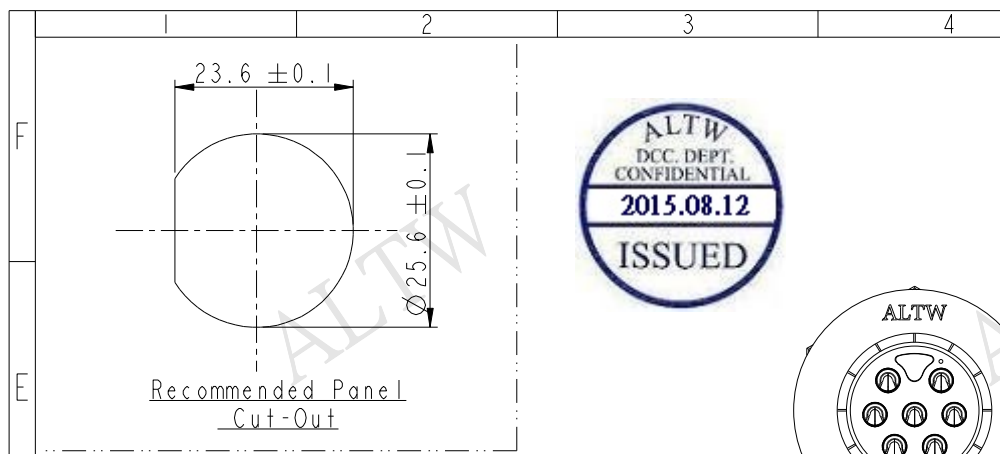

Note:
* Important Dimension To Check.
* Waterproof Rate: IP67
* Housing: Nylon+GF, Black
* Male Pin: Copper Alloy, Gold Plated
* Gasket: Silicone, Gray
* Screw Nut: Nylon+GF, Black
* Use with waterproof cap or dust cap
Maximum Panel Thickness: 1.8mm
* Use without waterproof cap or dust cap
Maximum Panel Thickness: 3.0mm

UNIT: mm		TOLERANCE		TITLE	
.X ±0.25		.XX ±0.1		LARGE	
.XXX ±0.05		ANGLES ±1°		PANEL SCREW M CONN M PIN	
SCALE 1:1		SIZE A4		SHEET 1 OF 1	
REV. A		WC-REV. A.2		QC: Inspection item	

ITEM NO		DRAWN BY		DATE	
DWG NO		CHECKED BY		DATE	
CUSTOMER		APPROVED BY		DATE	
ALTW		Jerry		2015-07-17	

Amphenol LTW
安費諾亮泰企業股份有限公司