



## Typical Applications

Heaters (seat, front/rear windows), Fan motors control, Fuel pump control, Wiper motors control, Headlight control, Air-conditioning, Lighting control, Electromagnet control, Start / Stop control

## Features

- 35A switching capability
- Ambient temp.: range up to 125°C
- 1 Form A & 1 Form C contact arrangement
- Plastic sealed and dust protected types available
- RoHS & ELV compliant

## CHARACTERISTICS

Contact arrangement	1A, 1C		5Hz to 17.3Hz 10mm DA
Voltage drop (initial)	NO:Typ.15mV,250mV max.(at 10A) NC:Typ.25mV,250mV max.(at 10A)	Vibration resistance <sup>4)</sup>	17.3Hz to 50Hz 58.9m/s <sup>2</sup> 50Hz to 100Hz 29.4m/s <sup>2</sup>
Max. continuous current <sup>1)</sup>	NO: 35A(23°C)、30A(85°C)、18A(125°C) NC: 25A(23°C)、20A(85°C)、10A(125°C)	Shock resistance <sup>4)</sup>	100Hz to 200Hz 19.4m/s <sup>2</sup>
Typ. switching current	Lamp:Make inrush peak current 150A Resistive:Break 35A	Flammability <sup>5)</sup>	UL94-HB or better (meets FMVSS 302)
Max. switching voltage	16VDC	Termination	QC <sup>7)</sup>
Min. contact load	1A 6VDC	Construction	Plastic sealed, Dust protected
Electrical endurance	1×10 <sup>5</sup> OPS	Unit weight	Approx. 22g
Mechanical endurance	1 x 10 <sup>7</sup> OPS (300ops/min)	Mechanical data	cover retention (pull & push): 200N min.
Initial insulation resistance	100MΩ (at 500VDC)		terminal retention (pull & push): 100N min.
Dielectric strength <sup>2)</sup>	500VAC		terminal resistance to bending (front & side): 10N min. <sup>6)</sup>
Operate time	Typ.: 5ms (at nomi. vol.) Max.: 10ms (at nomi. vol.)		
Release time <sup>3)</sup>	Typ.: 2ms Max.: 10ms	<p>1) For NO contacts, measured when applying 100% rated voltage on coil.      2) 1min, leakage current less than 1mA.      3) The value is measured when voltage drops suddenly from nominal voltage to 0 VDC and coil is not paralleled with suppression circuit.      4) When energized, opening time of NO contacts shall not exceed 100μs, when non-energized, opening time of NC contacts shall not exceed 100μs, meantime, NO contacts shall not be closed.      5) FMVSS: Federal Motor Vehicle Safety Standard.      6) Test point is at 2mm away from terminal end, and after removing testing force, the terminal transfiguration shall not exceed 0.5mm.      7) Do NOT knock on relays with hard objects such as rubber rod and rubber hammer during mounting, which might lead to relay damage.</p>	
Ambient temperature	-40°C to 125°C		
Storage temperature	-40°C to 155°C		

CONTACT DATA <sup>4)</sup>

Load voltage	Load type	Load current A		On/Off ratio		Electrical endurance OPS	Contact material	Load wiring diagram <sup>3)</sup>	Ambient temp.				
		1C		1A	On s								
		NO	NC										
Standard 13.5VDC	Resistive	Make	35	20	35	2	2	1×10 <sup>5</sup>	See diagram 1				
		Break	35	20	35								
	Inductive	Make <sup>1)</sup>	80	---	80	2	2	1×10 <sup>5</sup>	See diagram 2				
		Break	30	---	30								
	Lamp	Make	150 <sup>2)</sup>	---	150 <sup>2)</sup>	2	2	1×10 <sup>5</sup>	See diagram 3				
		Break	30	---	30								






HONGFA RELAY

ISO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

2019 Rev. 1.00

- 1) Corresponds to the peak inrush current on initial actuation.
- 2) Corresponds to the peak inrush current on initial actuation (cold filament).
- 3) The load wiring diagrams are listed below:



- 4) Loads mentioned in this chart is for relays with no parallel diode or Zener Diode. For those with parallel diode, Zener Diode or other components, please contact Hongfa for more technical supports.
- Please also contact Hongfa if the actual application load is different from what mentioned above.

## COIL DATA

at 23°C

	Nominal voltage VDC	Pick-up voltage VDC max.	Drop-out voltage VDC min.	Coil resistance x(1±10%)Ω	Parallel resistance <sup>1)</sup> x(1±5%) Ω	Equivalent resistance x(1±10%)Ω	Power consumption W	Max. allowable overdrive voltage <sup>2)</sup> VDC	
								at 23°C	at 85°C
Standard	12	8	1.0	124	---	---	1.16	20	15
	12	8	1.0	124	680	104.9	1.37	20	15

1) The power consumption of parallel resistance is 0.5W.

2) Max. allowable overdrive voltage is stated with no load applied and minimum coil resistance.

## ORDERING INFORMATION

HFV6-G / 12 -Z S T N -R (XXX)

Type

Coil voltage 12: 12VDC

Contact arrangement H: 1 Form A Z: 1 Form C

Construction<sup>1)</sup> S: Plastic sealed<sup>2)</sup> Nil: Dust protected

Contact material T: AgSnO<sub>2</sub>

QC Coil Terminal width N: 2.8 mm Nil: 4.8 mm

Parallel coil components	R: Parallel transient suppression resistors
	D: Parallel transient suppression diode, with anode connected to terminal#2
	D1: Parallel transient suppression diode, with anode connected to terminal#1
	Nil: Without parallel components

Special code<sup>3)</sup> XXX: Customer special requirement Nil: Standard

Notes: 1) Dust protected version is recommended.

2) If parallel diode, Zener Diode or other components are required, please contact Hongfa for more technical supports.


3) The customer special requirement express as special code after evaluating by Hongfa.

## OUTLINE DIMENSIONS AND WIRING DIAGRAM

Unit: mm


### Outline Dimensions

HFV6-G/12-Z□□-□(XXX)

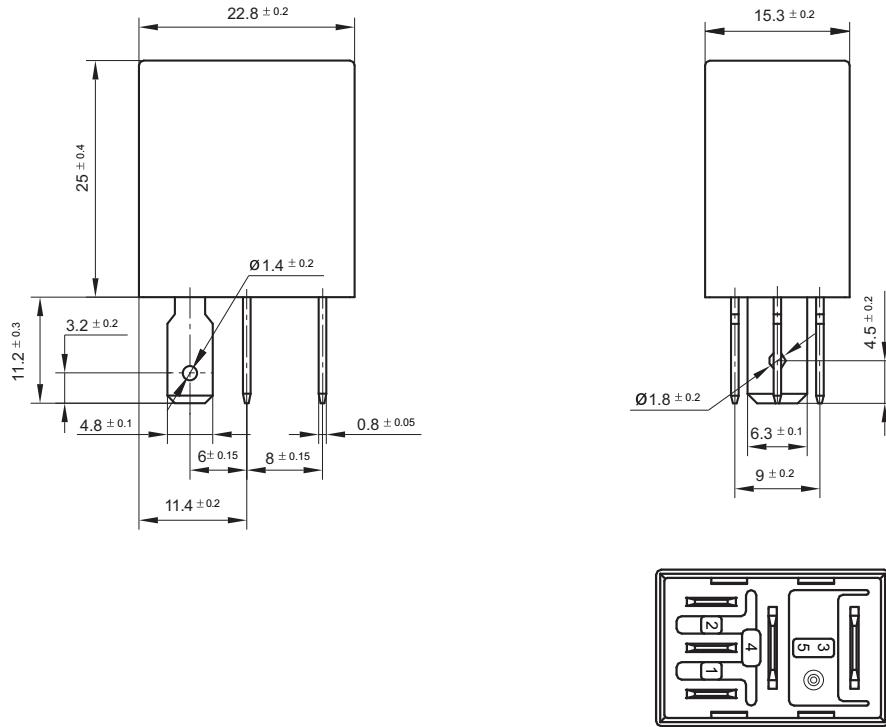

(Bottom view)

HFV6-G/12-Z□□N-□(XXX)

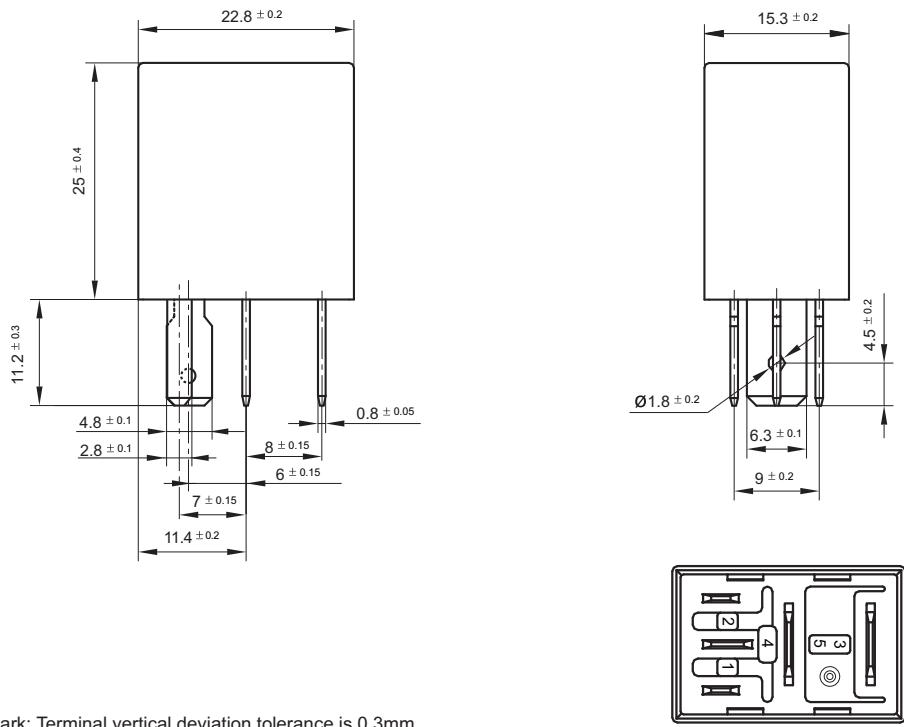

(Bottom view)


Remark: Terminal vertical deviation tolerance is 0.3mm.

## OUTLINE DIMENSIONS AND WIRING DIAGRAM


Unit: mm

### Wiring Diagram


HFV6-G/12-H□□□(XXX)




HFV6-G/12-Z□□□(XXX)




HFV6-G/12-H□□□-R(XXX)




HFV6-G/12-Z□□□-R(XXX)




HFV6-G/12-H□□□-D(XXX)




HFV6-G/12-Z□□□-D(XXX)



HFV6-G/12-H□□□-D1(XXX)




HFV6-G/12-Z□□□-D1(XXX)



## CHARACTERISTIC CURVES

Ambient temperature curve of the electrical endurance test

Ambient temp. curve (one cycle)

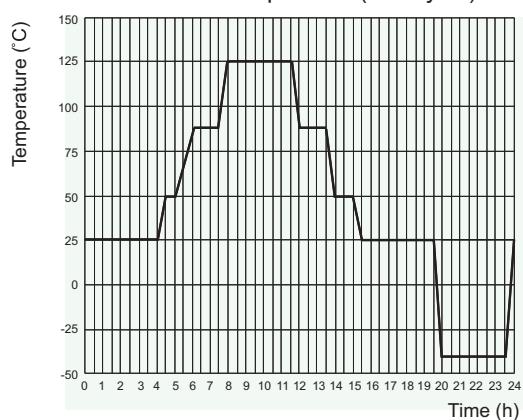

- 1) The minimum temperature is -40°C.
- 2) The maximum temperature is 125°C.

### Disclaimer

The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. In case there is specific criterion (such as mission profile, technical specification, PPAP etc.) checked and agreed by and between customer and Hongfa, this specific criterion should be taken as standard regarding any requirement on Hongfa product.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.