

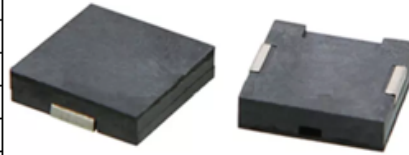


SPECIFICATION		
1	Model No.	BUZ-EPT1230S-HL-03-4.0-16-R
2	Rated Voltage (Vp-p)	3
3	Max Input Voltage (Vp-p)	1~25
4	Rated Current (mA)	≤5
5	Resonance Frequency (KHz)	4.0±0.5
6	Capacitance at 120Hz (pF)	16000±30%
7	Sound Output at 10cm (dB)	≥75
8	Operating Temperature (°C)	-20 ~ +70
9	Storage Temperature (°C)	-30 ~ +80
10	Weight (g)	0.3
11	Housing Material	LCP
12	Rohs	Yes

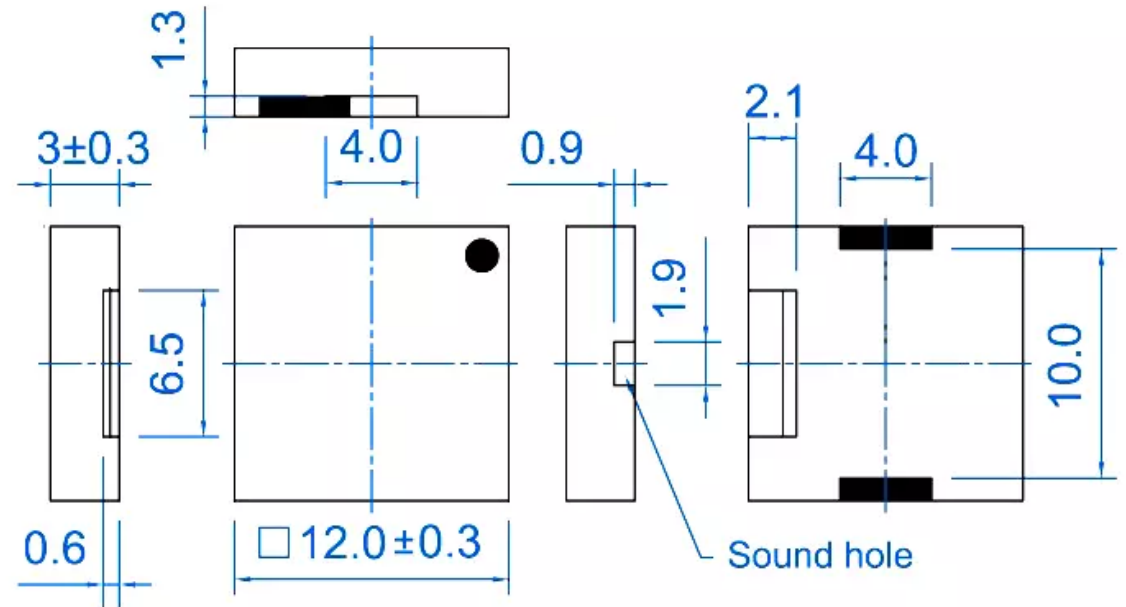

REVISION HISTORY			
LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	9/23/2003	Y M
A			
C			
B			

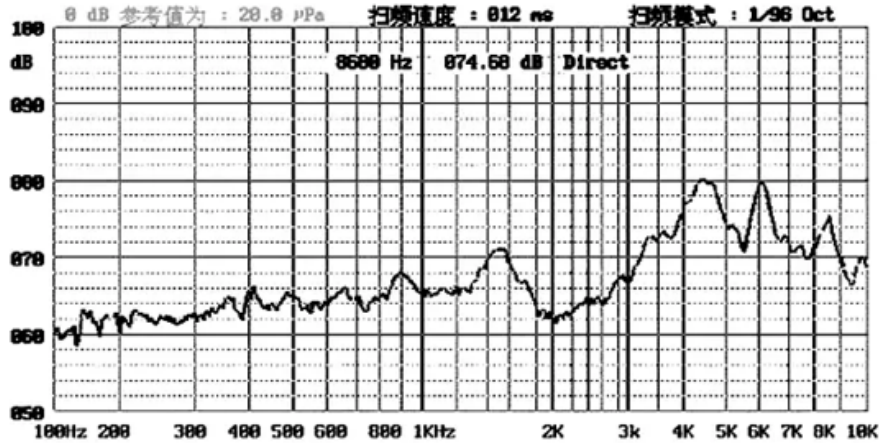

NOTES:

- 1.ALL DIMENSIONS ARE IN MILLIMETERS
- 2.SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE