

SPECIFICATION


Ultrasonic Annunciator

1	Model No.	LDG51A-5.5V-20
2	Rated Voltage (Vp-p)	5.5
3	Operating Voltage (Vp-p)	30 Max
4	* Operating Frequency (Hz)	20000±5000
5	Rated Frequency Range (Hz)	2500~60000
6	*Sound Output at 50cm (dB)	≥100
7	Operating Temperature (°C)	-20~+70
8	Storage Temperature (°C)	-30~+80
9	paper cone	Mylar cone
10	Weight (g)	7

*Value applying at 5.5Vp-p, 20KHz super wave 50cm

Dimensions Unit: mm Tolerance: ±0.5mm Except Specified

Dimensions Unit: mm Tolerance: ±0.5mm Except Specified

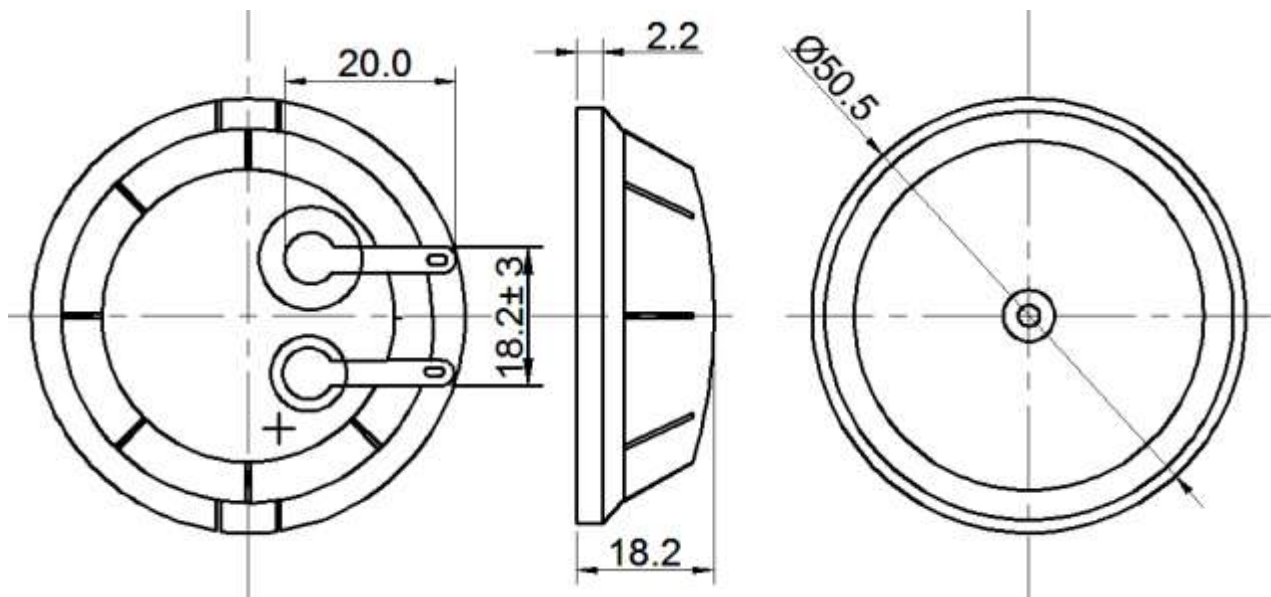

Drawing by	Checked by	Approved by	Date	Page
丁锦锦	韦 娟	宋雪琪	2017.7.20	1/2

SPECIFICATION
Ultrasonic annunciator

Alteration History

Change NO.	Note	Before of changes	After of changes	Reason	Revision
F201707027001	A	无	添加针距: 18.2±0.3mm	内部变更	韦娟
Drawing by		Checked by	Approved by	Date	Page
丁锦锦		韦 娟	宋雪琪	2017.7.20	2/2