


# D 3008



Ø30x8mm(Ø1.18"x0.31")

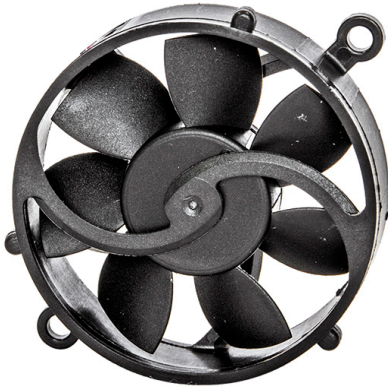


HOUSING	Thermoplastic PBT+30% Fiber Glass, UL94V-0
IMPELLER	Thermoplastic PBT+30% Fiber Glass, UL94V-0
BEARING	Sleeve
OPERATING TEMPERATURE	-10°C to + 60°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	3.1 g
ROHS COMPLIANCE	Yes
APPLICATION	For thermal solution for MR16/E27 LED lighting, mini projector
IP LEVEL	IP21 (Special IP Rating On Request)

30 mm

## SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D3008V3HS	3.3	0.045	0.1485	4200	0.04	1.02	1.79	0.05	15.9
D3008V5HS	5.0	0.065	0.325	6200	0.08	2.07	2.72	0.08	24.3

## DIMENSION

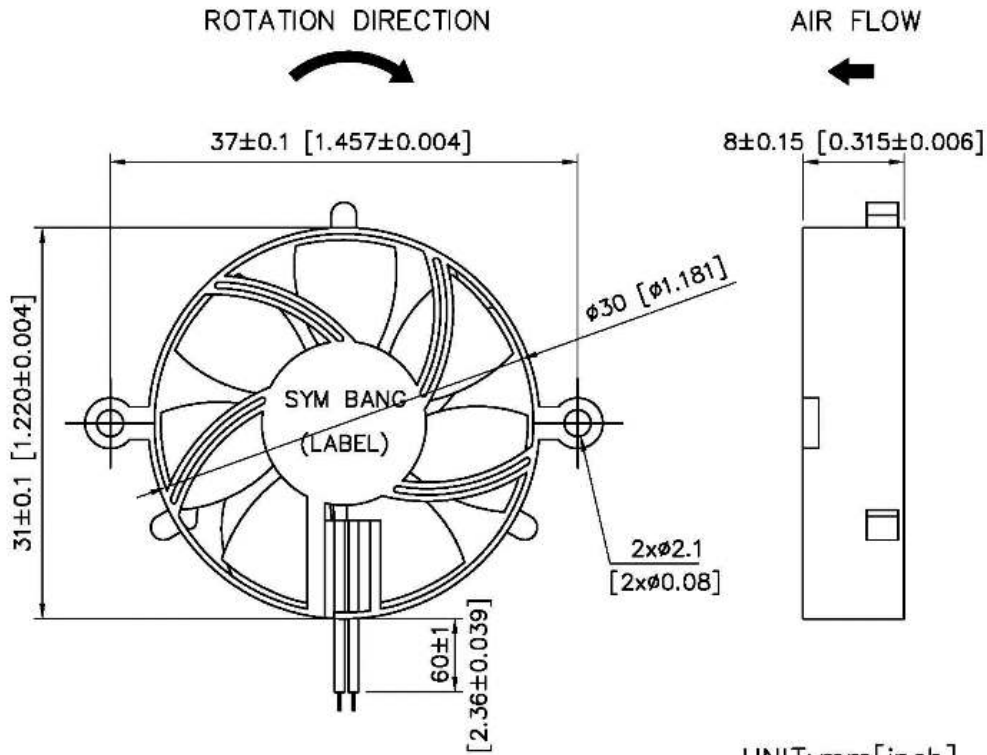

# AIR PERFORMANCE

