



BTA40 and BTA/BTB41 Series

STANDARD

40A TRIACs

MAIN FEATURES:


| Symbol | Value | Unit |
|-------------------|-------------|------|
| $I_{T(RMS)}$ | 40 | A |
| V_{DRM}/V_{RRM} | 600 and 800 | V |
| $I_{GT(Q_1)}$ | 50 | mA |

DESCRIPTION

Available in high power packages, the BTA/BTB40-41 series is suitable for general purpose AC power switching. They can be used as an ON/OFF function in applications such as static relays, heating regulation, water heaters, induction motor starting circuits, welding equipment... or for phase control operation in high power motor speed controllers, soft start circuits...

Thanks to their clip assembly technique, they provide a superior performance in surge current handling capabilities.

By using an internal ceramic pad, the BTA series provides voltage insulated tab (rated at 2500 V RMS) complying with UL standards (File ref.: E81734).

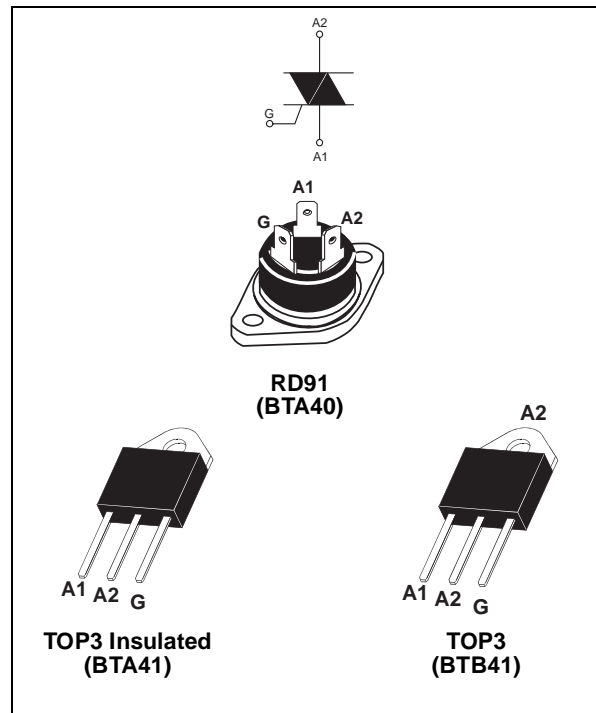

ABSOLUTE MAXIMUM RATINGS

| Symbol | Parameter | | Value | Unit | |
|--------------------|--|---------------------------|---------------------------|--------------------------------|----------------------|
| $I_{T(RMS)}$ | RMS on-state current (full sine wave) | RD91 | 40 | A | |
| | | TOP3 | | | |
| | | TOP3 Ins. | $T_c = 80^\circ\text{C}$ | | |
| I_{TSM} | Non repetitive surge peak on-state current (full cycle, T_j initial = 25°C) | F = 60 Hz | t = 16.7 ms | 420 | A |
| | | F = 50 Hz | t = 20 ms | 400 | |
| I^2t | I^2t Value for fusing | tp = 10 ms | | 880 | A^2s |
| dI/dt | Critical rate of rise of on-state current $I_G = 2 \times I_{GT}$, $t_r \leq 100$ ns | F = 120 Hz | $T_j = 125^\circ\text{C}$ | 50 | A/ μs |
| V_{DSM}/V_{RSM} | Non repetitive surge peak off-state voltage | tp = 10 ms | $T_j = 25^\circ\text{C}$ | $V_{DRM}/V_{RRM} + 100$ | V |
| I_{GM} | Peak gate current | tp = 20 μs | $T_j = 125^\circ\text{C}$ | 8 | A |
| $P_{G(AV)}$ | Average gate power dissipation | $T_j = 125^\circ\text{C}$ | | 1 | W |
| T_{stg} T_j | Storage junction temperature range Operating junction temperature range | | | - 40 to + 150 - 40 to + 125 | $^\circ\text{C}$ |

BTA40 and BTA/BTB41 Series

ELECTRICAL CHARACTERISTICS (T_j = 25°C, unless otherwise specified)

| Symbol | Test Conditions | Quadrant | | Value | Unit |
|--------------------------|---|--------------------|------|-----------|------|
| I _{GT} (1) | V _D = 12 V R _L = 33 Ω | I - II - III IV | MAX. | 50 100 | mA |
| V _{GT} | | ALL | MAX. | 1.3 | V |
| V _{GD} | V _D = V _{DRM} R _L = 3.3 kΩ T _j = 125°C | ALL | MIN. | 0.2 | V |
| I _H (2) | I _T = 500 mA | | MAX. | 80 | mA |
| I _L | I _G = 1.2 I _{GT} | I - III - IV | MAX. | 70 | mA |
| | | II | | 160 | |
| dV/dt (2) | V _D = 67 % V _{DRM} gate open T _j = 125°C | | MIN. | 500 | V/μs |
| (dV/dt) _c (2) | (dl/dt) _c = 20 A/ms T _j = 125°C | | MIN. | 10 | V/μs |

STATIC CHARACTERISTICS

| Symbol | Test Conditions | | Value | Unit | |
|---------------------|---|------------------------|-------|------|----|
| V _{TM} (2) | I _{TM} = 60 A t _p = 380 μs | T _j = 25°C | MAX. | 1.55 | V |
| V _{to} (2) | Threshold voltage | T _j = 125°C | MAX. | 0.85 | V |
| R _d (2) | Dynamic resistance | T _j = 125°C | MAX. | 10 | mΩ |
| I _{DRM} | V _{DRM} = V _{RRM} | T _j = 25°C | MAX. | 5 | μA |
| I _{RRM} | | T _j = 125°C | | 5 | mA |

Note 1: minimum I_{GT} is guaranteed at 5% of I_{GT} max.

Note 2: for both polarities of A2 referenced to A1

THERMAL RESISTANCES


| Symbol | Parameter | | Value | Unit |
|----------------------|-----------------------|------------------------|-------|------|
| R _{th(j-c)} | Junction to case (AC) | RD91 TOP3 Insulated | 0.9 | °C/W |
| | | TOP3 | 0.6 | |
| R _{th(j-a)} | Junction to ambient | TOP3 | 50 | °C/W |
| | | TOP3 Insulated | | |

PRODUCT SELECTOR

| Part Number | Voltage (xxx) | | Sensitivity | Type | Package |
|----------------|---------------|-------|-------------|----------|---------|
| | 600 V | 800 V | | | |
| BTA40-xxxB | X | X | 50 mA | Standard | RD91 |
| BTA/BTB41-xxxB | X | X | 50 mA | Standard | TOP3 |

BTB: Non insulated TOP3 package

ORDERING INFORMATION

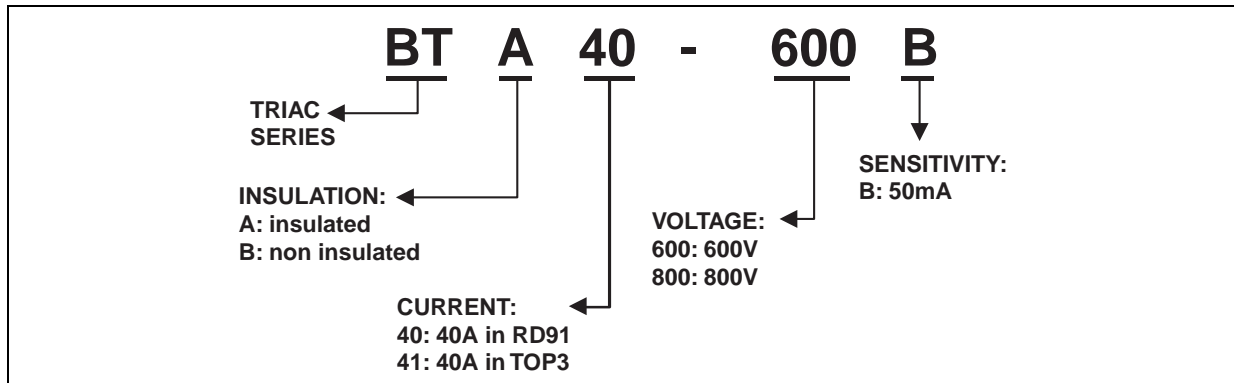

OTHER INFORMATION

| Part Number | Marking | Weight | Base quantity | Packing mode |
|----------------|---------------|--------|---------------|--------------|
| BTA40-xxxB | BTA40xxxB | 20.0 g | 25 | Bulk |
| BTA/BTB41-xxxB | BTA/BTB41xxxB | 4.5 g | 120 | Bulk |

Note: xxx= voltage

Fig. 1: Maximum power dissipation versus RMS on-state current (full cycle).

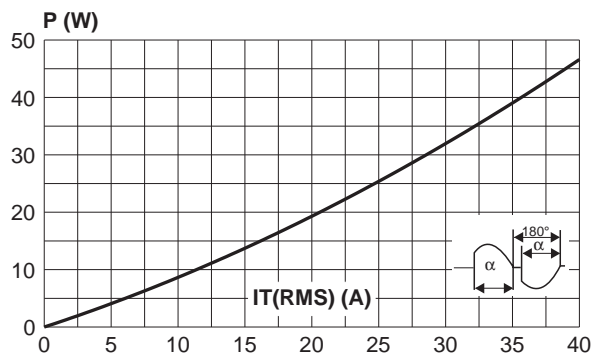


Fig. 2: RMS on-state current versus case temperature (full cycle).

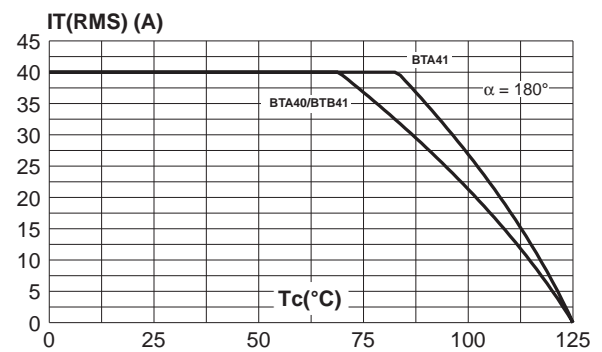


Fig. 3: Relative variation of thermal impedance versus pulse duration.

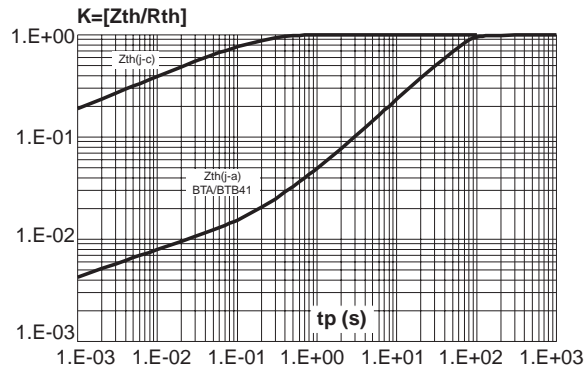


Fig. 5: Surge peak on-state current versus number of cycles.

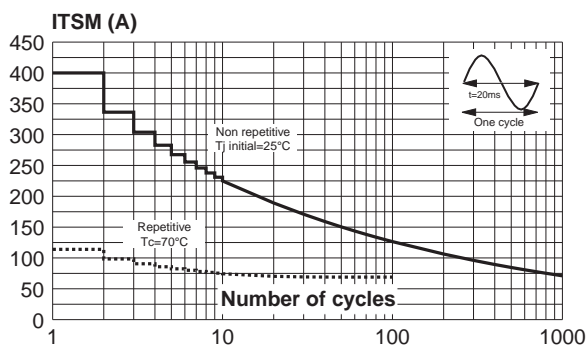


Fig. 7: Relative variation of gate trigger current, holding current and latching current versus junction temperature (typical values).

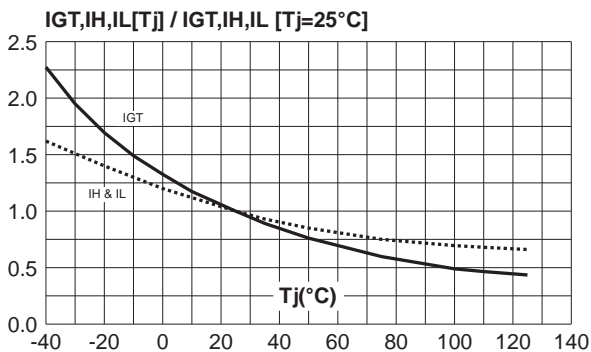


Fig. 4: On-state characteristics (maximum values).

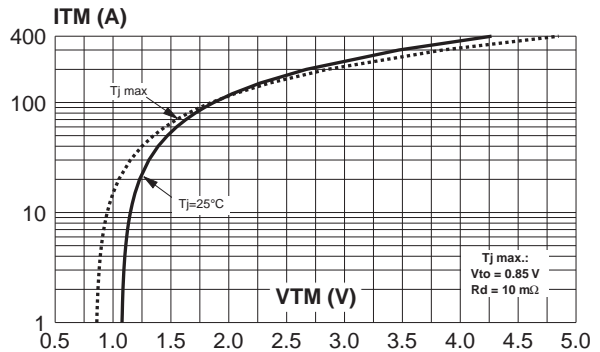


Fig. 6: Non-repetitive surge peak on-state current for a sinusoidal pulse with width $t_p < 10$ ms, and corresponding value of I^2t .

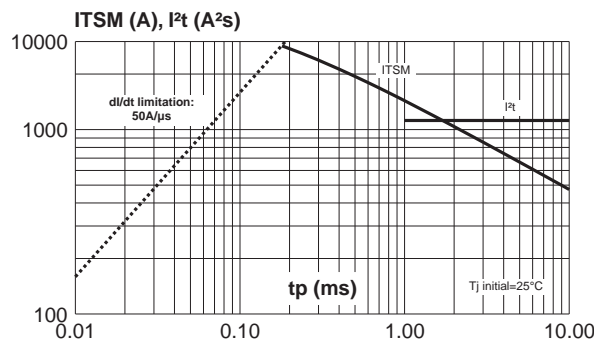


Fig. 8: Relative variation of critical rate of decrease of main current versus $(dV/dt)_c$ (typical values).



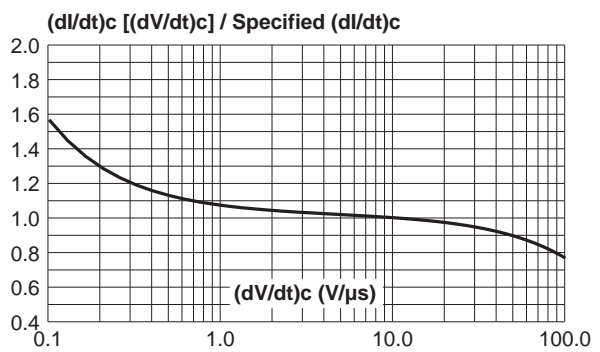


Fig. 9: Relative variation of critical rate of decrease of main current versus junction temperature.

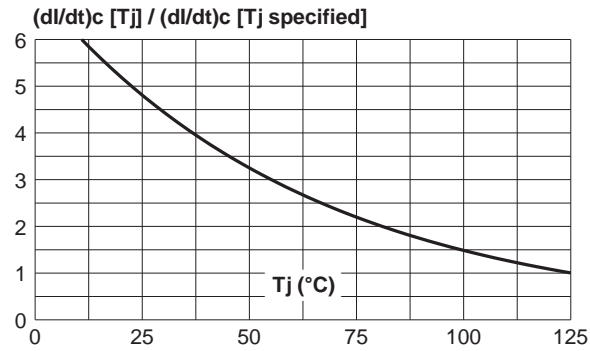

PACKAGE MECHANICAL DATA


RD91 (Plastic)

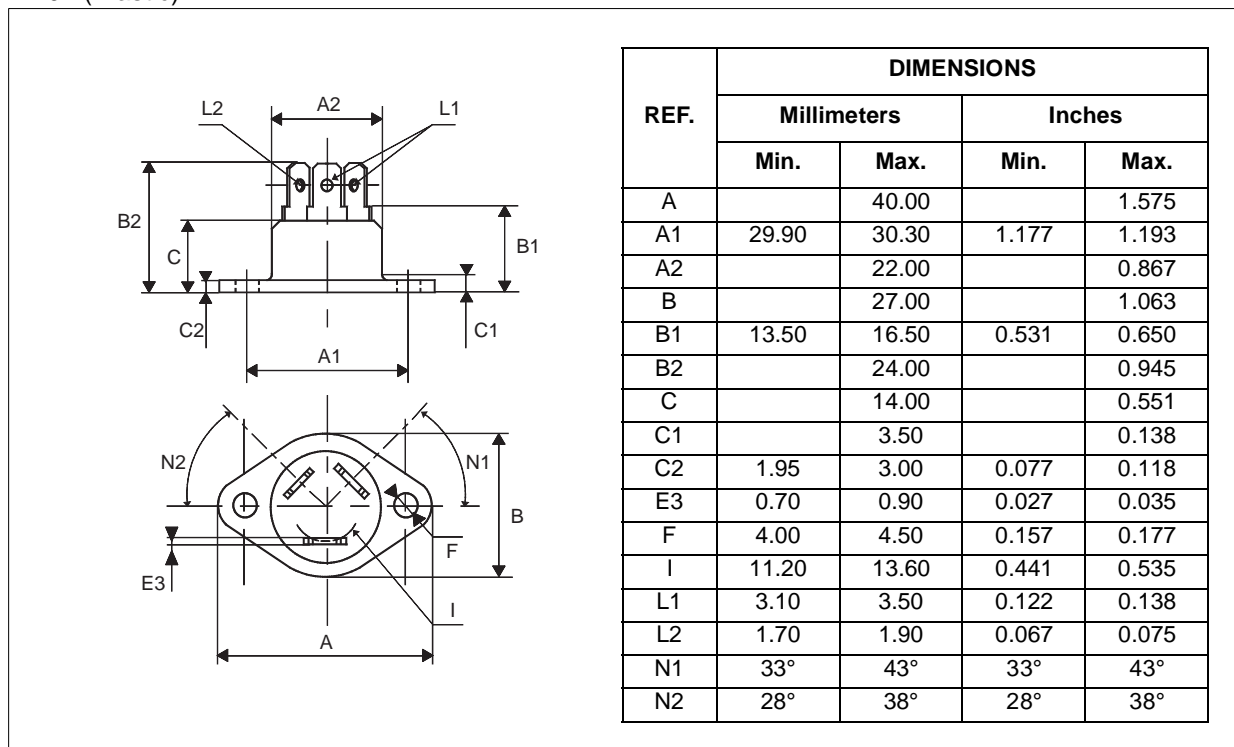

BTA40 and BTA/BTB41 Series

PACKAGE MECHANICAL DATA

TOP3 Ins.(Plastic)

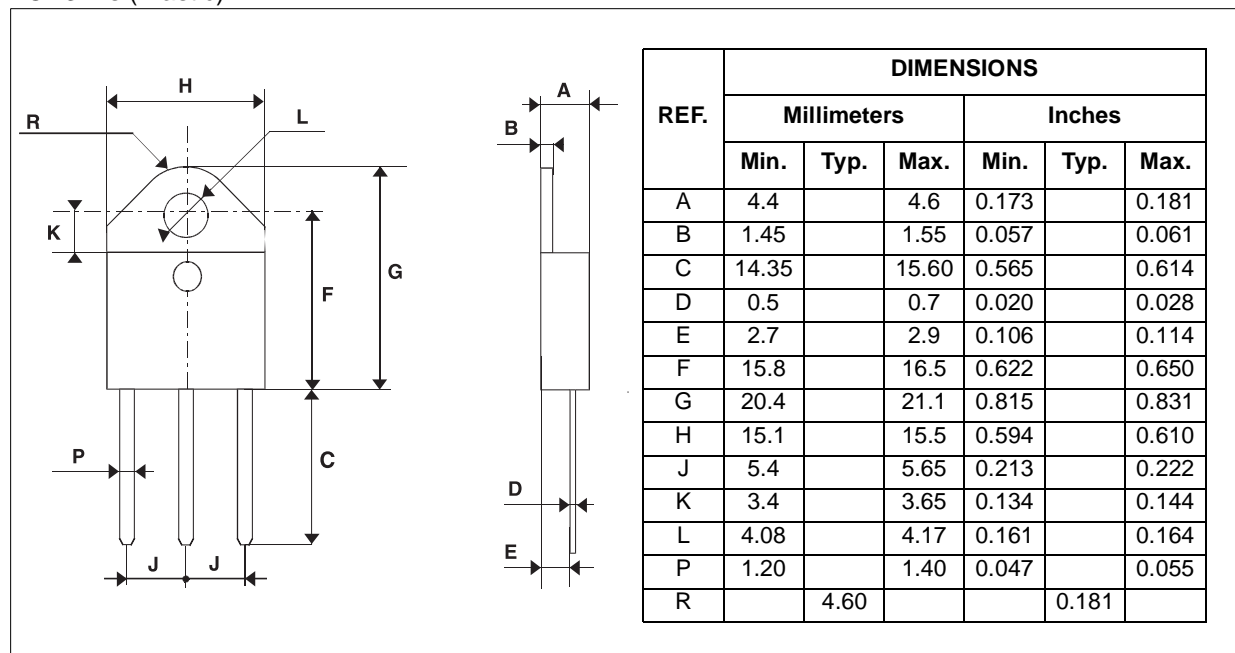

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics
 All other names are the property of their respective owners.
 © 2003 STMicroelectronics - All Rights Reserved

STMicroelectronics GROUP OF COMPANIES
 Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany -
 Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain -
 Sweden - Switzerland - United Kingdom - United States
www.st.com