

4VA Low Transformer

Electrical squem UI 30

· All the models with primary 2x115 V for connection series at 230 V or parallel for 115 V.

· Frequency 50/60 Hz.

· Ambient temperature 40° C


· Increment of temperature: 30° C

· According to norms EN 61558


· Thermal Material class B 130° C

· The fixation is carried out by means of 4 screws DIN 7971 2,9x10 mm.

· Manufactures other voltages of pins positions on it demands.

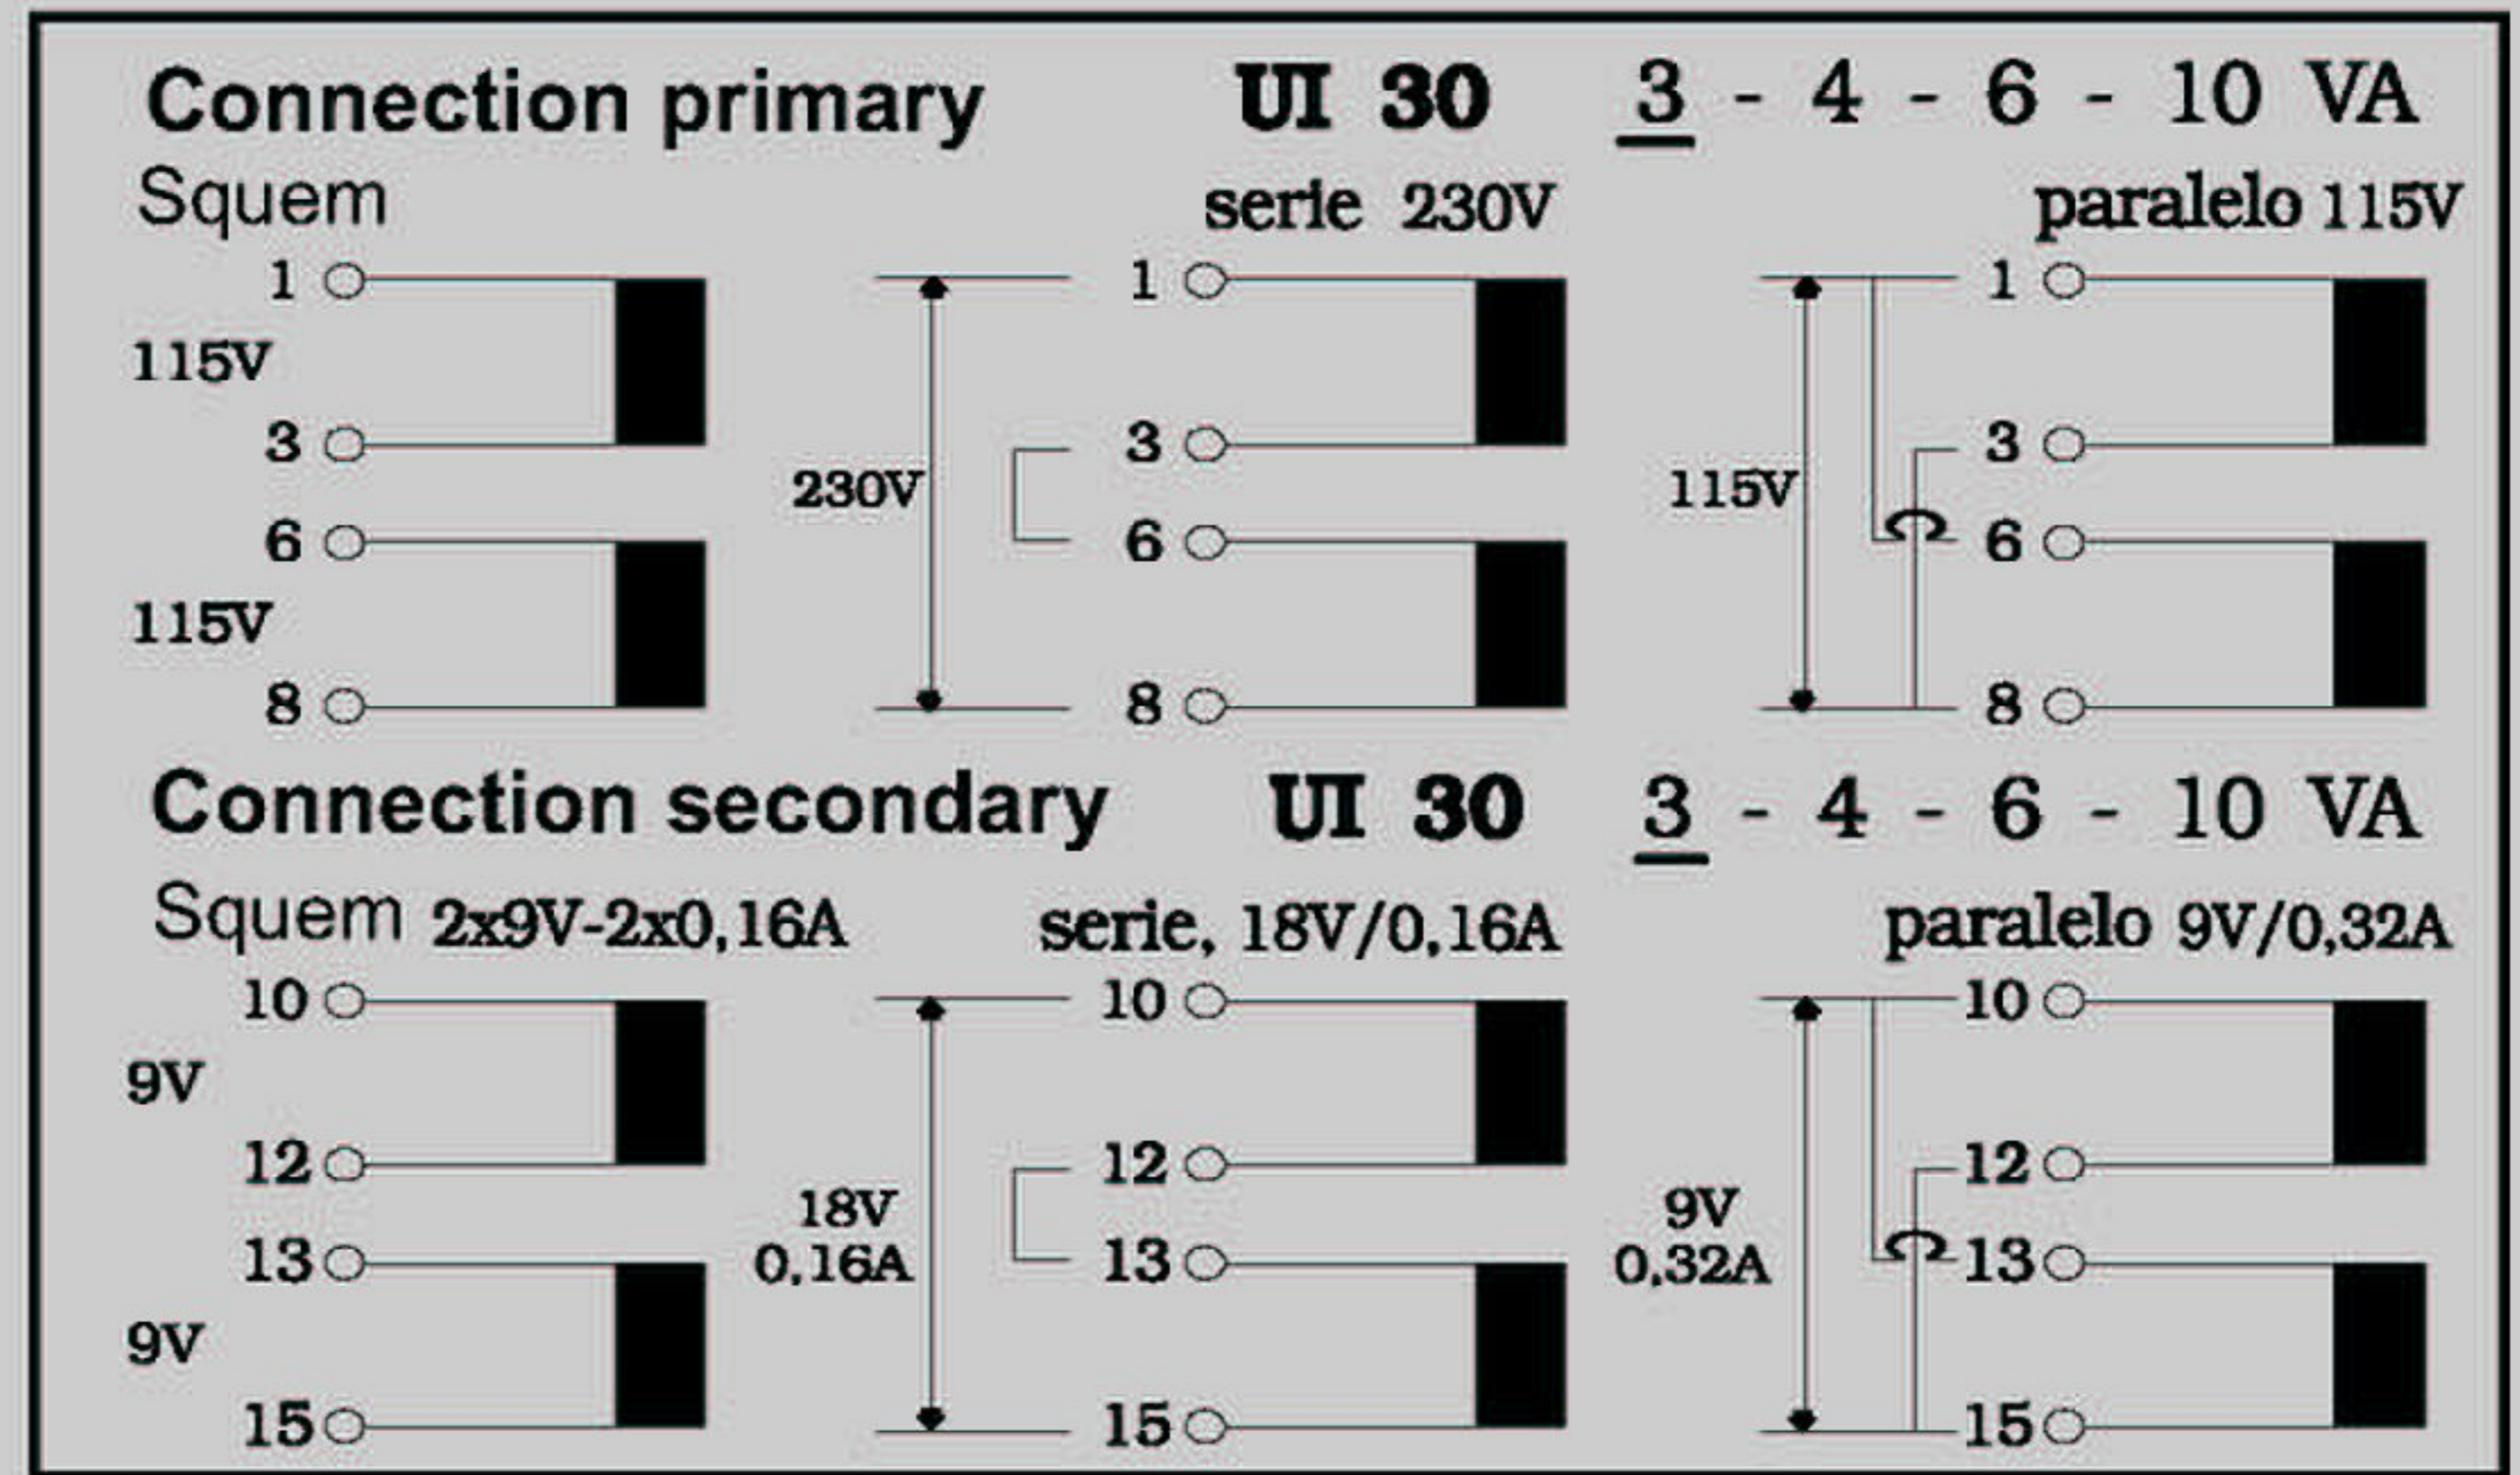

Measures and weight

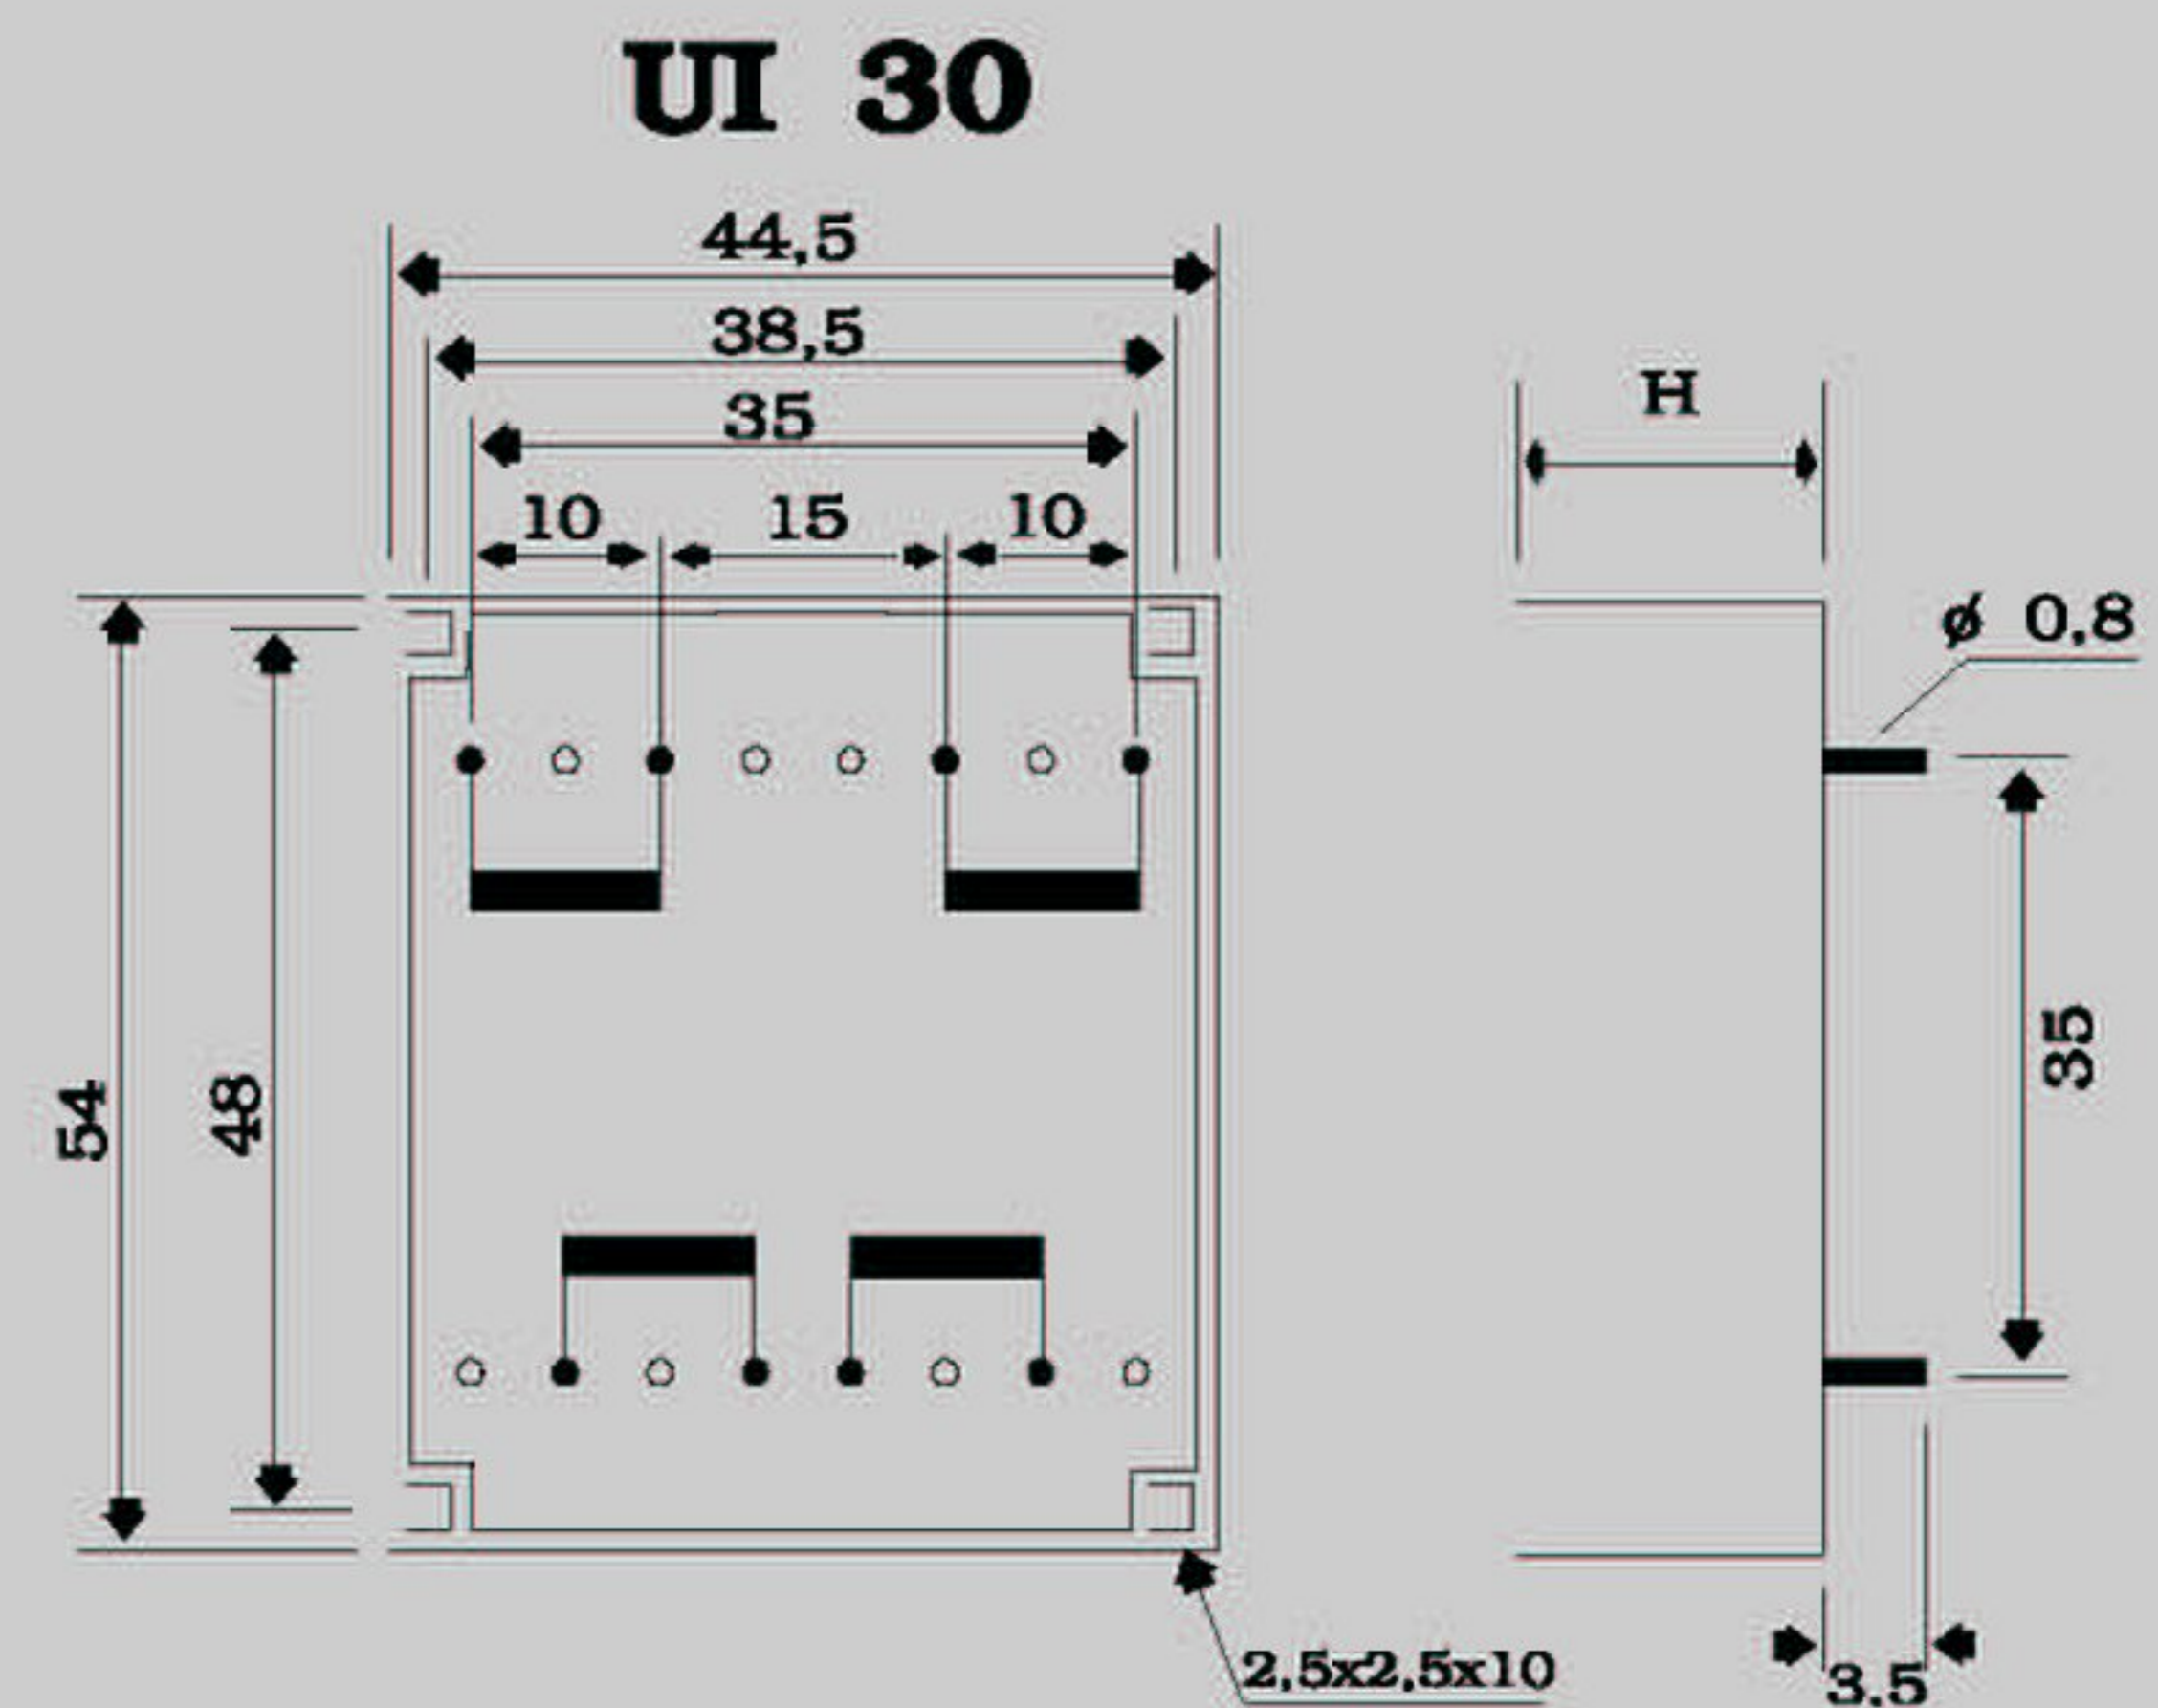

CODE	POWER	HEIGHT	WEIGHT
E04xx	4	19,5	0,155

CODE	POWER	FORMAT	SECONDARY	HEIGHT	FUSE
E0445	4	30/7,5	2x4,5V.- 2x0,444A	19,5	Fus. 500mA
E0406	4	30/7,5	2x6V.- 2x0,333A	19,5	Fus. 315mA
E0475	4	30/7,5	2x7,5V.- 2x0,266A	19,5	Fus. 315mA
E0409	4	30/7,5	2x9V.-2x0,222A	19,5	Fus. 250mA
E0412	4	30/7,5	2x12V.-2x0,166A	19,5	Fus. 160mA
E0415	4	30/7,5	2X15V.-2X0,133A	19,5	Fus. 125mA
E0418	4	30/7,5	2X18V.-2X0,111A	19,5	Fus. 100mA
E0424	4	30/7,5	2X24V.-2X0,083A	19,5	Fus. 80mA