

## Specification

Housing: Thermoplastic, UL94V-0

Contact: Copper Alloy

Shell: Copper Alloy





Voltage Current Rating: 1.5AMP.40V AC

Insulation Resistnce: 500M $\Omega$  Min

Contact Resistance: 50m $\Omega$  Max

Dielectric Withstanding Voltage: 500V AC

Temperature Range: -20 $^{\circ}$ C to+85 $^{\circ}$ C

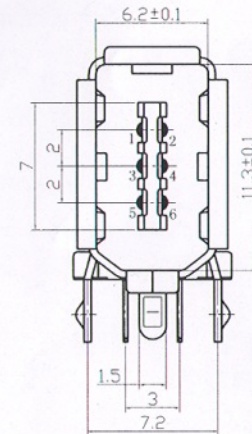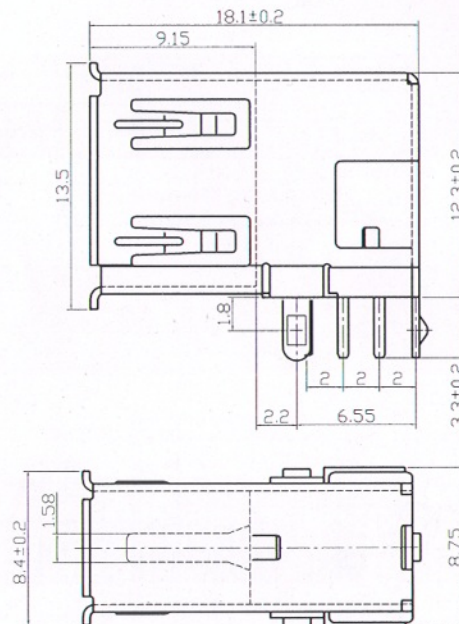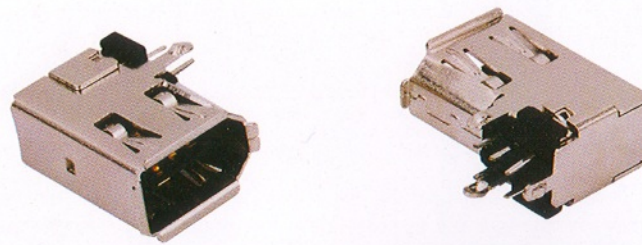

Tolerances unless otherwise specified:  
0-1±0.05, 1-10±0.1, 10-20±0.15, 20-30±0.2.