




足立特殊测器(厦门)有限公司 NTS INSTRUMENT (XIAMEN) CO., LTD.
 壕门电子科技(厦门)有限公司 HOPE TECHNOLOGIC (XIAMEN) CO., LTD.

NA116 (原TLA) 称重传感器 (Former TLA) LOAD CELL

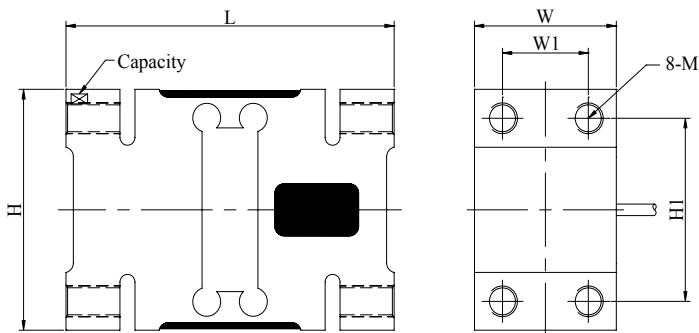

主视 (Front View)

右视 (Right View)

TYPE	Capacity(kg)	L	W	W1	H	H1	M	台面尺寸 Platform Size
NA115	50~200	156	44	24	75	50	M12×1.75	600×600mm
NA116	250~500	146	60	36	95	70	M12×1.75	600×800mm
NA117	750~2000	176	76	46	125	95	M16×2	1200×1200mm

用途特点: 台秤

Usage & Features: Platform scale

技术参数 Technical Parameter

额定负荷 Rated Capacities	250, 500, 750, 1000, 2000 (kg)
额定输出 Rated Output	2.0 mV/V±5%
非线性 Non-linearity	0.02 %F.S
滞后 Hysteresis	0.02 %F.S
重复性 Repeatability	0.02 %F.S
蠕变 (20分钟) Creep(20min)	0.02 %F.S
输出温度影响 Temperature Effect On Output	0.002 %F.S
零点温度影响 Temperature Effect On Zero	0.003 %F.S
零点平衡 Zero Balance	±0.0200 mV/V
输入阻抗 Input Impedance	410±15 Ω
输出阻抗 Output Impedance	350±5 Ω
绝缘阻抗 Insulation Impedance	≥5000 MΩ
安全过载率 Safe Overload	150 %F.S
极限过载率 Ultimate Overload	200 %F.S
工作温度范围 Operating Temperature Range	-20~60 °C
推荐工作电压 Recommended Excitation	5~12 VDC
最大工作电压 Maximum Excitation	15 VDC
材质 Construction	铝合金 Aluminum Alloy
防护等级 Protection Class	IP66 / IP67
电缆 Cable	φ6×3 m
接线方式 Mode of Connection	红: 电源+, 黑: 电源-, 绿: 信号+, 白: 信号- Red (EXC+), Black (EXC-), Green (SIG+), White (SIG-)

地址: 厦门市湖里区悦华东路恒盛大厦三楼 (Address: 3FL HENG SHENG BUILDING YUE HUA E. RD. HU-LI XIAMEN CHINA)

TEL: +86-592-5629881/882 FAX: +86-592-5629883 <http://www.mavin.cn> E-mail: mavin@mavin.cn