

# VECO VANSONIC ENTERPRISE CO., LTD.



8F., No. 7, Lane 16, Sec. 2, Szechwan Road, Panchiao, Taipei Hsien, TAIWAN.

TEL: +886-2-29626335

FAX: +886-2-29625220

E-MAIL: VANSONIC@MS4.HINET.NET


1.	<b>MODEL:</b>	<b>45CP08</b>
2.	Dimension	Outer Diameter <b>45</b> mm. Baffle Opening <b>40</b> mm.
		Height <b>Refer to Drawing.</b> Weight <b>11.2</b> Grams.
3.	Magnet	Materials <b>Rare Earth</b> . Size $\phi$ <b>12.5X1.5</b> mm.
4.	Nominal Impedance	<b>8 Ohm</b> $\pm$ <b>15</b> % At <b>1200</b> Hz.
5.	Power Rating	Normal <b>250</b> mW. Maximum <b>500</b> mW.
6.	Lowest Resonant Frequency	<b>600</b> $\pm$ <b>20</b> % Hz.
7.	Output Sound Pressure Lever (S.P.L.)	<b>82</b> $\pm$ <b>3</b> db / 0.25Watt ; $\pm$ 0.5 Meter.
		Average at <b>800, 1000, 1200, 1500</b> Hz.
8.	Frequency Range	<b>300</b> ~ <b>6000</b> Hz. Average SPL - 10 db.
9.	Distortion	<b>5</b> % Maximum At <b>1000</b> Hz. <b>250</b> mW.
10.	Abnormal Sound Test	Must be Normal Tested By <b>1.5</b> Volts. Sine Wave.
11.	Load Test	White Noise with Weighted Filter <b>1.5</b> Volts.(RMS) <b>24</b> Hrs.
12.	Polarity	Diaphragm shall move Forward when Apply a Positive DC.
		Current to the "+" or "Marked" Terminal.

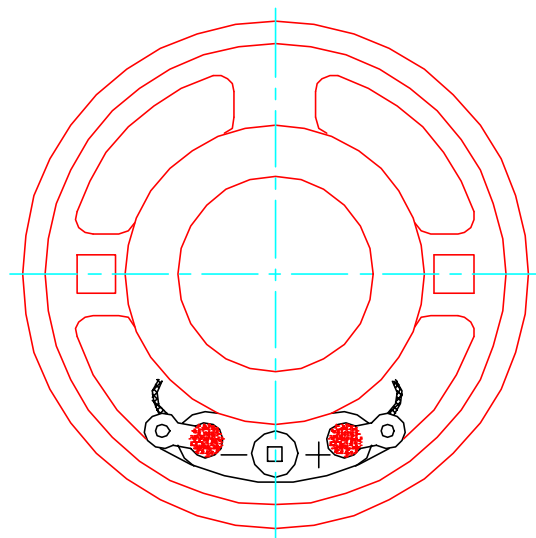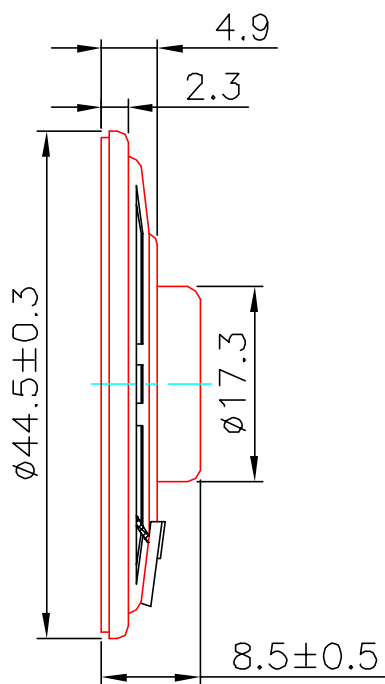

Unit : mm

Housing Material : METAL

45CP08 VOL:1.414V(0.25W) DIS:0.5M VANSONIC  
X:1.0000kHz \*Y:82.19dB ZA:Live Curve SSR Fund.

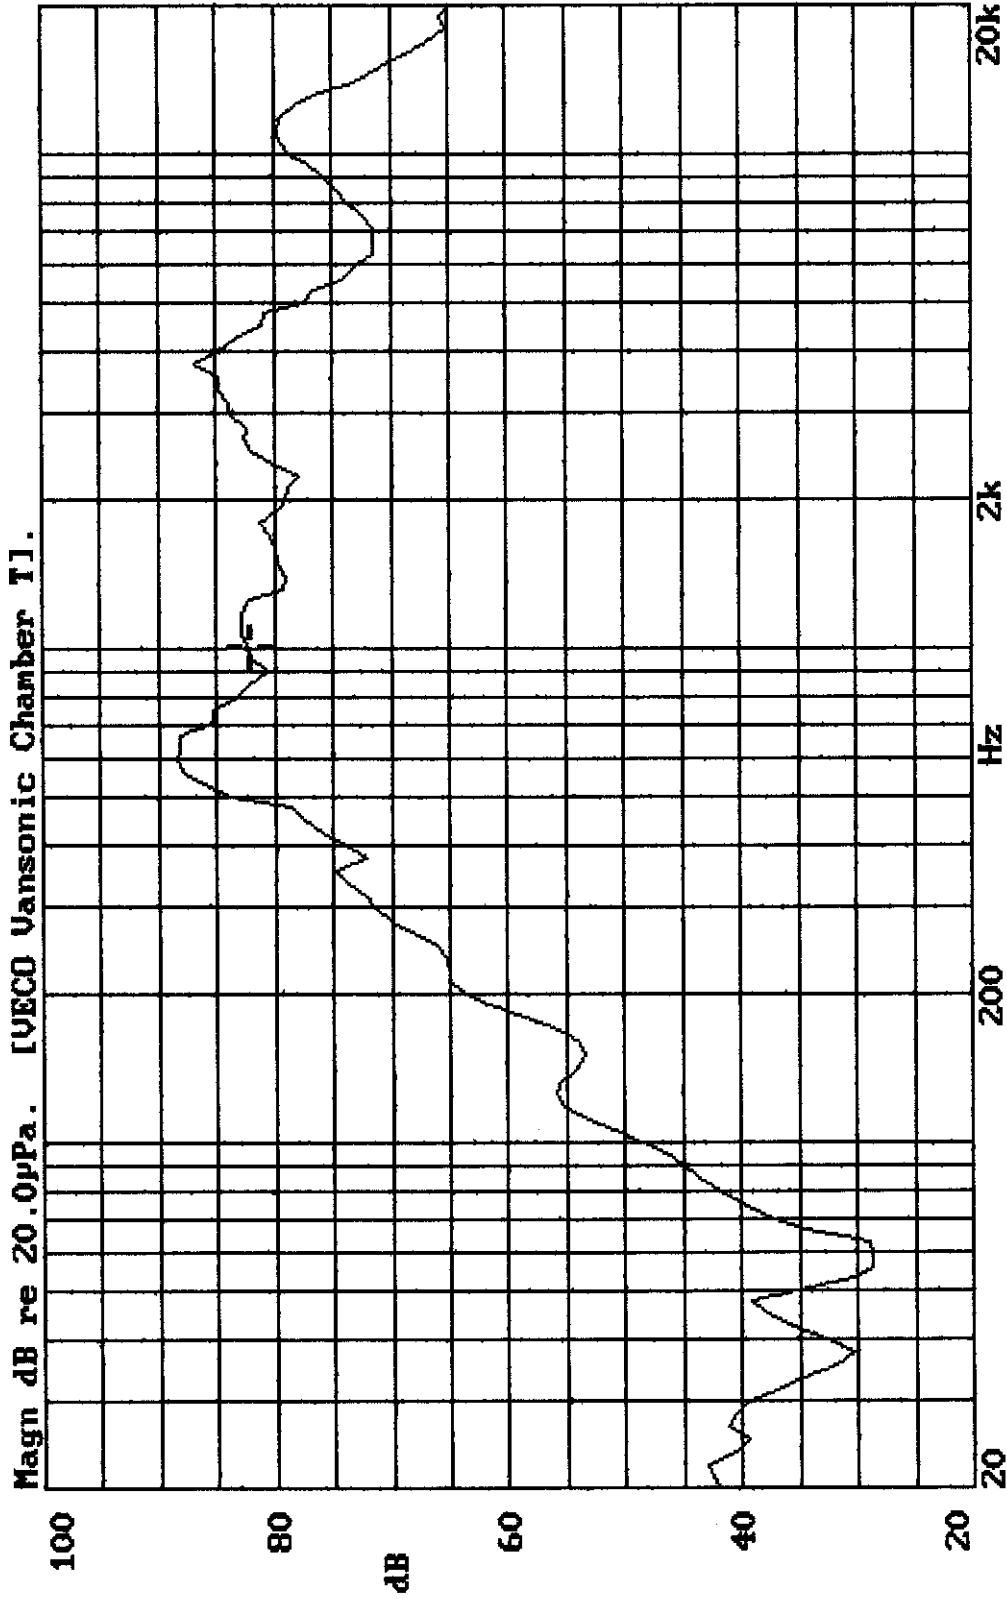

04-AUG-1999 16:20:52

Mode: SPEAKER

