
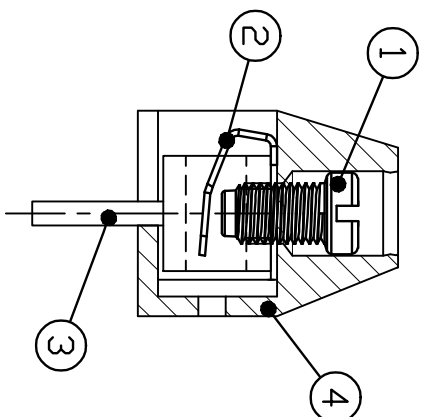
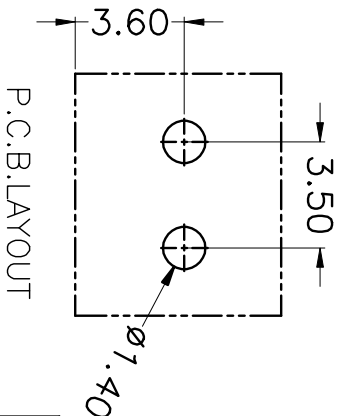
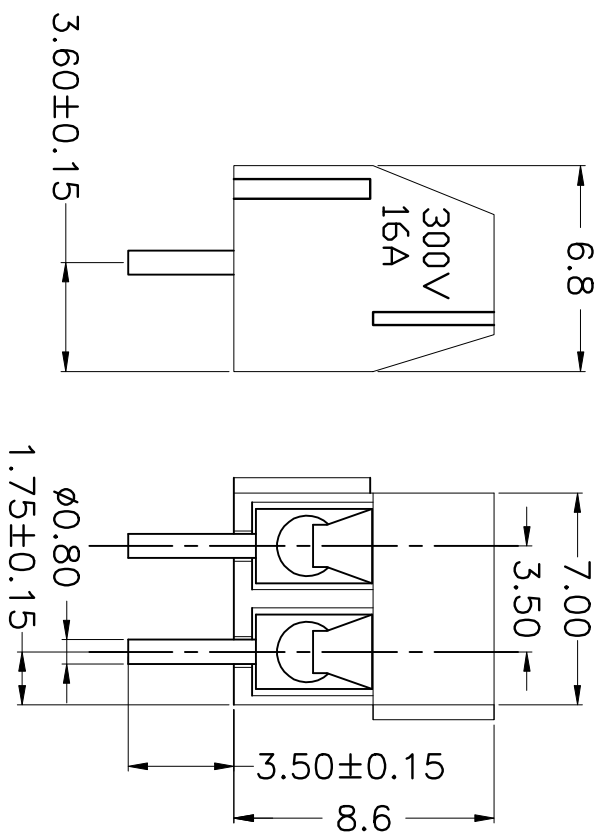


序号	修改原因	制图	审核	批准
A				



• Material

- ①Screw:M2.0, steel, zinc Plated
- ②WireProtector:Phosphor bronze, Ni plated or stainless steel
- ③Pin header:Brass, Tin plated
- ④Housing: PA66, UL94V-0

• Electrical

Rated Voltage: 300V
Rated Current: 16A
Contact Resistance: 20mΩ
Insulation Resistance: 500MΩ/1000V
Withstanding Voltage: AC1250V/1min
Wire Range: 24-18AWG 1.0mm²

• Mechanical

Temperature Range: -40℃~+105℃
MAX Soldering: +250℃, 5秒(5 Seconds)
Torque: 0.2Nm(1.77lb.in)
Strip length: 5-6mm

尺寸公差:

尺寸公差:	角度公差:
X, ±0.25	X, ±3°
.X, ±0.2	.X, ±2°
.XX, ±0.15	.XX, ±1°

投影法	比例	图例	备注
第一角投影	1:1		

KF350V-3.50-ZP	
单位	mm
纸张尺寸	A4
产品系列	KF350V

封装类型	AUTO CAD	图例	比例
比例	1:1		1\1
图例编号			

品牌	型号	规格
KAIFENG ELECTRONIC	KAIFENG ELECTRONIC	KAIFENG ELECTRONIC

慈溪市凯峰电子有限公司

KAIFENG ELECTRONIC CO.,LTD