
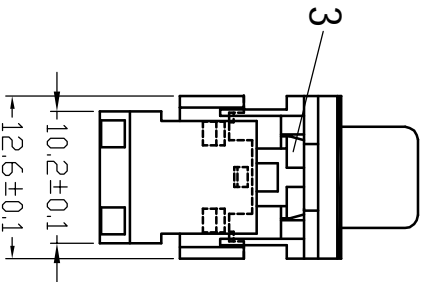
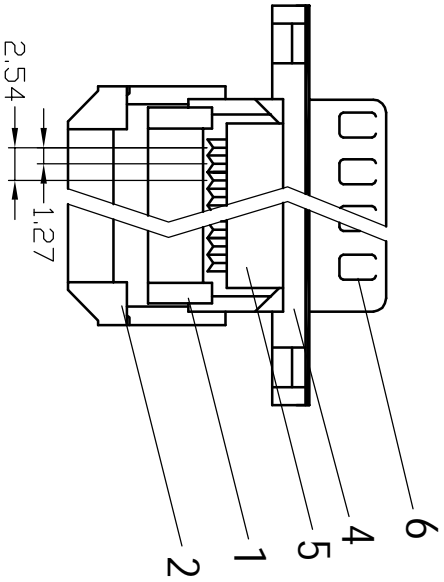


序号/Rev.No.	名称/Title	文件编号/File No.
1	103中盖	
2	103反折盖	
3	103后盖	
4	103M塑件主体	
5	103M端子	
6	铁壳	

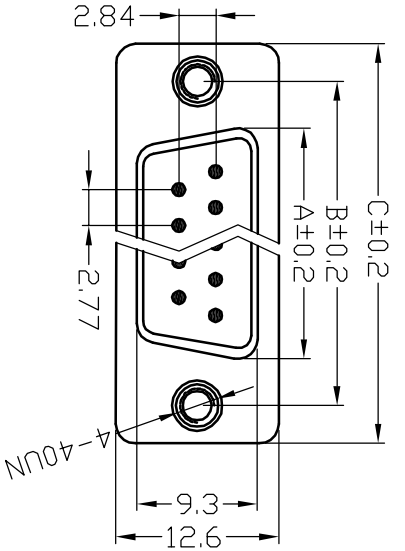

Position	A	B	C
9	17.78	24.99	30.81
15	26.15	33.32	39.20
25	39.94	47.04	53.10
37	56.56	63.50	69.50

Specifications:
 Contact Resistance: 30mΩ max. at DC 100 mA
 Insulator Resistance: 1000MΩ min. at DC 500V
 Current Rating: 5AMP

Dielectric Withstanding
 Voltage: AC 500V For 1 minute
 Operating Temperature: -55°C---+105°C
 Contact: Brass
 Housing: PBT &30% Glass Fiber (UL 94V-0)

序号/Rev.No. 更改记录/Revision note 签名/Signature 日期/Date

设计/Designed by 绘图/Drawn by 审核/Checked by 批准/Approved by

图名/Title

新亚电子

XI NVA ELECTRONIC CO., LTD

103M A 产品图

页序/Sheet

未注公差
 General Tolerance
 X: ±0.2 X': ±2
 .X ±0.1 .X' ±1
 .XX ±0.05 .XX' ±0.5
 .XXX ±0.01

单位/Unit: mm