REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED



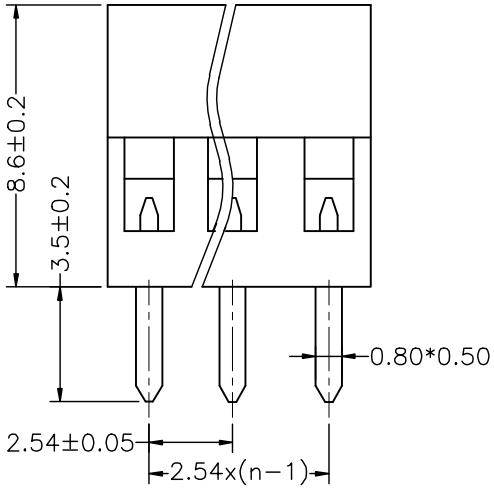

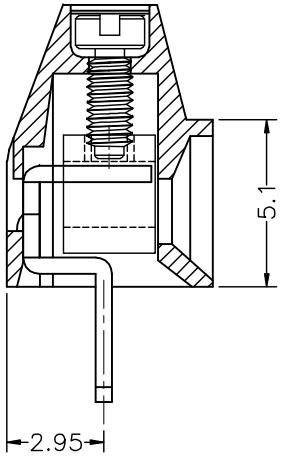

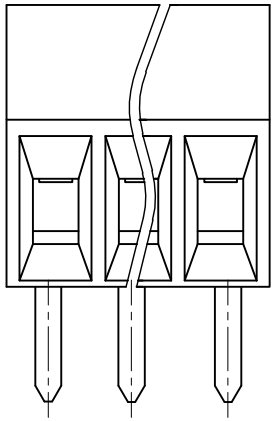



Material
- Screws: M1,5 Steel Zinc Plated
- Contact: Brass NI plated
- Pin Header: Brass, Tin Plated
- Housing: PA66, UL94V-0

Electrical
- Rated Voltage: 150V
- Rated Current: 6A
- Contact Resistance: 20mOhm
- Insulation Resistance: 5000MOhm/1000V
- Withstanding Voltage: AC 1500V/1Min
- Wire Range: 26 - 18AWG

Mechanical
- Temp. Range: -40C - +105C
- Max. Soldering: +250C for 5sec
- Torque: 0,15Nm
- Strip Length: 3,7 - 4,7mm

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.25	X.	±5°
.X	±0.15	.X	±3°
.XX	±0.10	.XX	±2°

DRAWING TYPE			
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.			

PROJECTION		TITLE	EURO TERMINAL BLOCKS PITCH2.54MM
UNITS	mm		
SHEET SIZE	A4	SERIES	KF120 SERIES

KAIFENG ELECTRONIC

慈溪市凯峰电子有限公司

KAIFENG ELECTRONIC CO.LTD