




REV	ECN.NO.	REVISIONS	REV.DRAWN	DATE
A		初版发行	MARK.MAO	2007/02/03
B		增加无卤料号说明	Yuqilong	2008/11/03
C		增加黑色材料代码,修改公差	sunquan	2012/06/28

SPECIFICATIONS

- . Rated Voltage : 250V AC DC
- . Rated Current : 1A, AC DC
- . Withstanding Voltage: 800V AC DC
- . Insulation resistance: 1000M Ω min
- . Temperature range: -25°C~+85°C
- . Contact resistance: Initial value/10 m Ω ? max
- . After environmental testing / 20m Ω ? max

HOUSING

- . Part No. : JS-1253D-XX-XX-NH Δ
- . Poles: 20.30.40.50
- . Blank: Nature
- . BK: Black
- . Blank: Normal
- . NH: Halogen Free
- . Material: PA66 UL 94V-0
- . Q'ty : 1,000 pcs/Bag
- . Halogen free product identification LOGO on the packing

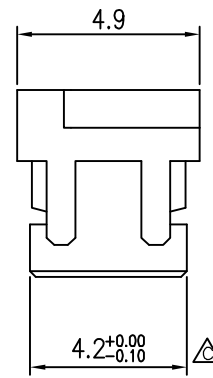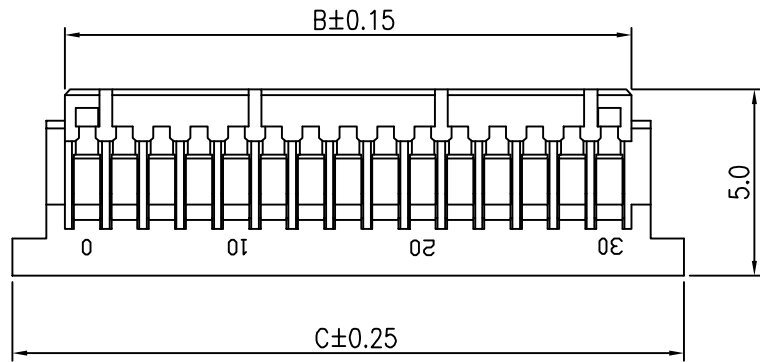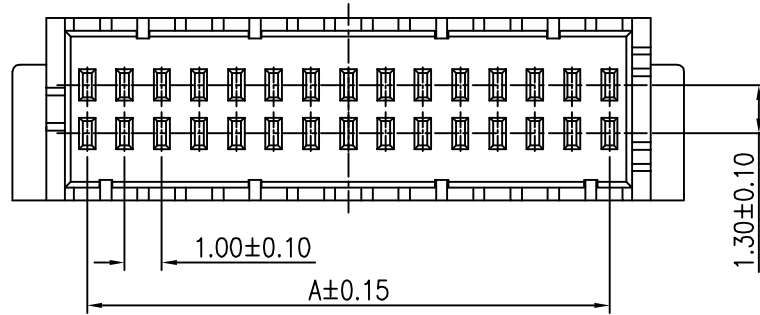

Poles	Part No	Dimension		
		A	B	C
20	JS-1253D-20	9.0	10.20	13.00
30	JS-1253D-30	14.0	15.20	18.00
40	JS-1253D-40	19.0	20.20	23.00
50	JS-1253D-50	24.0	25.20	28.00

X.± 0.40	X*.± 5.0*	UNITS MM	NAME(INTENDED USE)								
.X± 0.30	.X*.± 2.0*	MAT'L	CUSTOMER								
.XX± 0.20	.XX*.± 1.0*	-	PART NO.(INTENDED USE)	TITLE:							
.XXX± 0.10	.XXX*.± ---	FINISH	JS-1253D-XX-NH	JST(SHR) 1.0 HOUSING							
<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF CHYAO SHIUNN ELECTRONIC CO., LTD. AND SHALL NOT BE REPRODUCED. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF CHYAO SHIUNN ELECTRONIC CO., LTD.</small>			APPD:	DWG NO.:							
Q'TY	CHKD:	DR:	Yuqilong	2008/11/03	020-0003-1253D						
-	-	-	-	-	<table border="1"> <thead> <tr> <th>SCALE</th> <th>SHEET</th> <th>REV.</th> </tr> </thead> <tbody> <tr> <td>1:1</td> <td>1/1</td> <td>C</td> </tr> </tbody> </table>	SCALE	SHEET	REV.	1:1	1/1	C
SCALE	SHEET	REV.									
1:1	1/1	C									



符合环境管理物质