

Connector





Connectors micro-match 2.54mm

Electrical Characteristics:


Current Rating: 1 AMP
 Insulator Resistance: 1000M Ohm min. at DC 250V
 Contact Resistance: 20m Ohm max. at DC 100mA
 Operating Temperature: -45°C~+105°C

Material:

Housing: 9T
 Contacts: Phosphor copper
 Plating: Tin plated
 Cable: 1.27mm (0.050") pitch flat cable

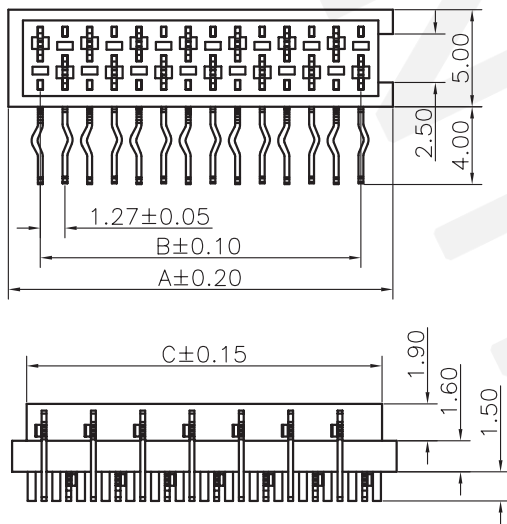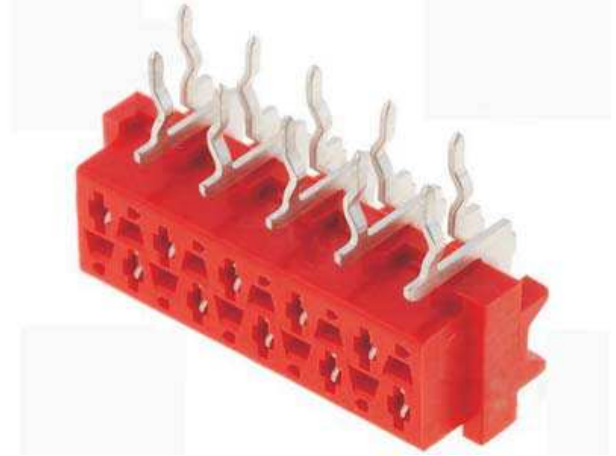

Part No.	A	B	C	Part No.	A	B	C
04	7.00	3.81	5.60	16	22.24	19.05	20.84
06	9.54	6.35	8.14	18	24.78	21.59	23.38
08	12.08	8.89	10.68	20	27.32	24.13	25.92
10	14.62	11.43	13.22	22	29.86	26.67	28.46
12	17.16	13.97	15.76	24	32.40	29.21	31.00
14	19.70	16.51	18.30	26	34.94	31.75	33.54

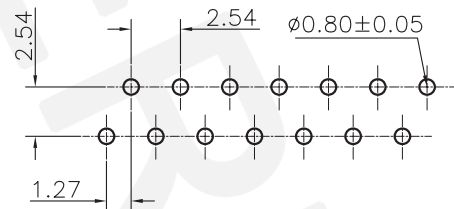

PCB Layout