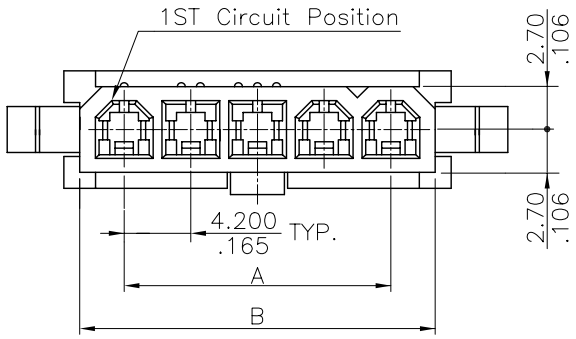

Note:

* Insulation material: Nylon 66, Color Nature
* Panel mount version is for use with 0.80mm(.031") or 2.00mm(.079") thick panels
* Panel should be punched in the direction of connector insertion

Ordering Code:

CP-01 ① 2 ② ** ③ 0 ④ * ⑤ S ⑥

① Series No.
② Type of Connector: 2= Plug
③ No of Circuits:
④ Plating Code: 0= Non plating
⑤ Variation: 0= UL 94V-2 WITH EARS
2= UL 94V-0 WITH EARS
1= UL 94V-2 WITHOUT EARS
3= UL 94V-0 WITHOUT EARS
⑥ Option: S= Single Row

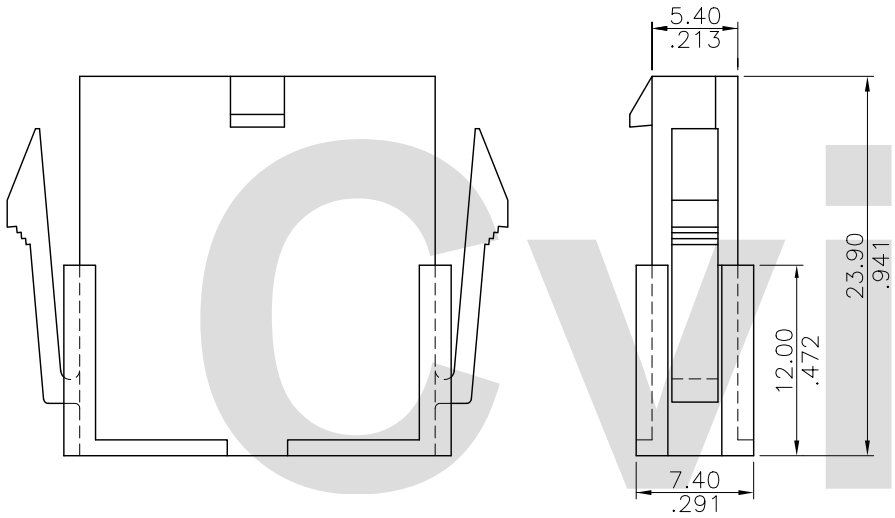

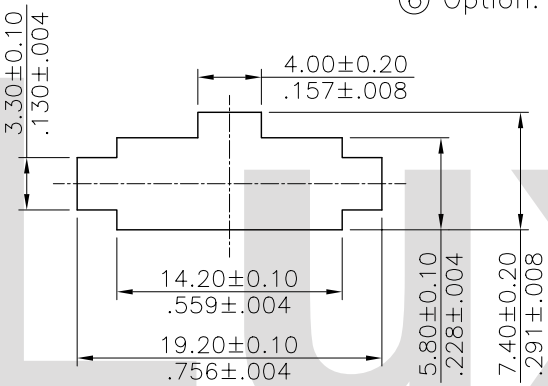

Panel Mounting Hole Details



3 CIRCUITS



4 CIRCUITS



5 CIRCUITS

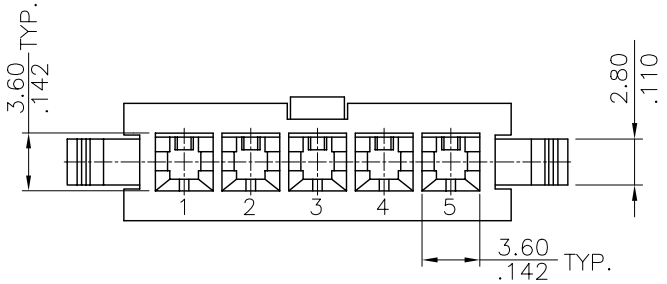

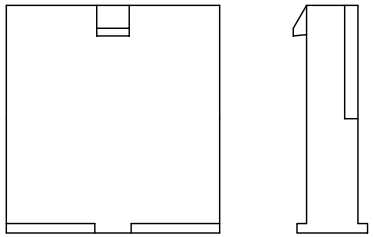

WITHOUT EARS

Circuits	Dimension	
	A	B
3	8.40(.331)	13.9(.547)
4	12.60(.496)	18.1(.713)
5	16.80(.661)	22.3(.878)

CIRCUIT PATTERN SCHEDULE

RoHS Compliant

SYM	NAME	DATE	REVISIONS
4			
3			
2			
1	Eisley	7/24/08"	ECN08350

CVILUX.XORP 2008.07.29 ISSUED

		DATE
DRAWN BY:	Eisley	7/24-08'
ENGINEER:	Eisley	7/24-08'
CHECKED BY:	David	7/24-08'
APPROVED BY:	Alex	7/24-08'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ± 0.38/.015	X.° ± 1°
.XX ± 0.25/.010	.X° ±
.XXX ± 0.10/.004	.XX° ±

TITLE: 4.20mm PICH PLUG CONN. (SINGLE ROW)

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CP0179SB	PART NO.	CP-012**0*S
SCALE	2 / 1	SHEET	1 OF 1