




REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.09.15	张荣

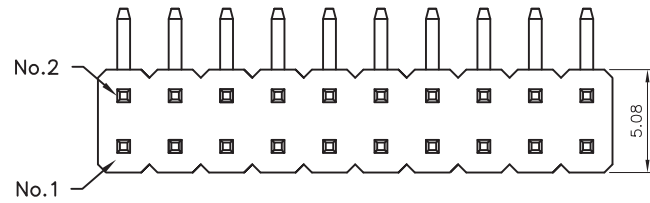


Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000M Min. Ω
 Dielectric Withstanding: 600V AC
 Contact Resistance: 20m Ω
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Brass
 Insulation Material: Polyester, UL 94V-0
 PBT
 All materials must be GP materials

RIGHT ANGLE TYPE
 N:NUMBER OF CONCACT/2

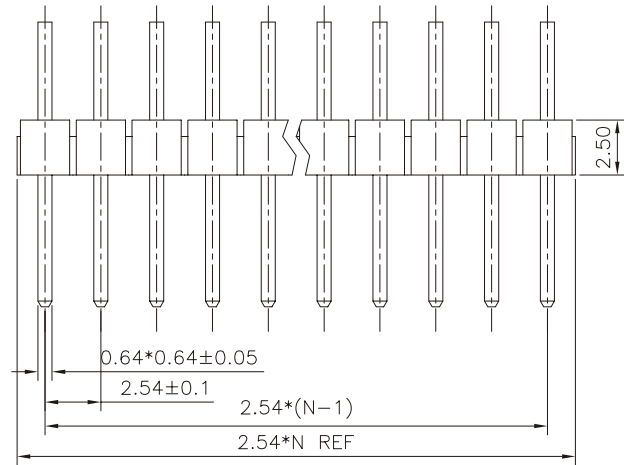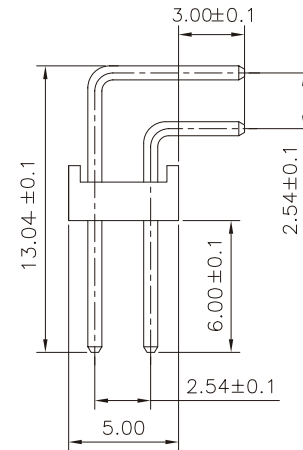

Recommended P.C.Board



CIXI ULO ELECTRONICS CO., LTD

GENERAL TOLERANCE	
X° ± 5.0°	X. ± 0.30
.X° ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

DESIGN: 张荣	DATE: 2007.09.15
CHECKED:	DATE:
AUDITED:	DATE:
APPROVED:	DATE:

DWG. NO.	PART NO. ULO-PH410-2*40RF11
TITLE.	

TITLE.
 2.54 PIN HEADER
 DUAL ROW R/A TYPE
 BASE 2.54H

REV.	UNIT.	SCALE.	PAGE.
01	mm	5:1	1/1

