

■ SPECIFICATIONS

- ⚠ • Voltage Rating : 250V AC/DC
- Current Rating : 3A AC/DC
- Withstanding Voltage : 1,000V AC/minute
- Insulation Resistance : 1,000MΩ min
- Temperature Range : - 25°C to + 85°C
- Contact Resistance : 20mΩ max.

■ HOUSING

- Part No. : JS-2001-XX XX
① ②

① Poles : 2-20

⚠ ② Color : BLANK : NATURE


BU : BLUE(660C)

R : RED(199C)

Y : YELLOW(122C)


⚠ • Material : Nylon 66 UL94V-0

Poles	Dimensions (mm)		
	A	B	C
2	2.50	7.30	5.70
3	5.00	9.80	8.20
4	7.50	12.30	10.70
5	10.00	14.80	13.20
6	12.50	17.30	15.70
7	15.00	19.80	18.20
8	17.50	22.30	20.70
9	20.00	24.80	23.20
10	22.50	27.30	25.70
11	25.00	29.80	28.20
12	27.50	32.30	30.70
13	30.00	34.80	33.20
14	32.50	37.30	35.70
15	35.00	39.80	38.20
16	37.50	42.30	40.70
17	40.00	44.80	43.20
18	42.50	47.30	45.70
19	45.00	49.80	48.20
20	47.50	52.30	50.70

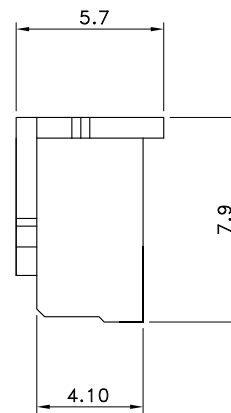

 喬訊電子工業股份有限公司
CHYAO SHIUNN
ELECTRONIC INDUSTRIAL LTD.

PART NO JS-2001-XXXX
2.50mm Crimp Style Connectors Housing

APPROVED BY	SCALE	UNIT	TOLERANCE	LTR	REVISION RECORD	NAME	DATE	LTR	REVISION RECORD	NAME	DATE
張育瑞		mm	.0 ±0.30	⚠	XXX	XXX	XXXX/XX/XX	⚠			
CHECKED BY	PROJ	VER NO.	.00 ±0.20	⚠	增加3D視圖	Jack	2011/08/17	⚠			
黃科源		a6	.000 ±0.10	⚠	增加CS和模號標示	Jack	2012/04/10	⚠			
			ANGLE		變更材質說明	Jack	2012/04/26		CUSTOMER		
DRAWN BY	DATE	SIZE	0° ±1°	⚠	Add the red type product	Jack	2012/07/13				
吳弘文	2013/06/21	A4	.0° ±	⚠	依規格書修正額定電壓	吳弘文	2013/06/21		Conforms to The RoHS Instruction		
			SHEET	1/1							