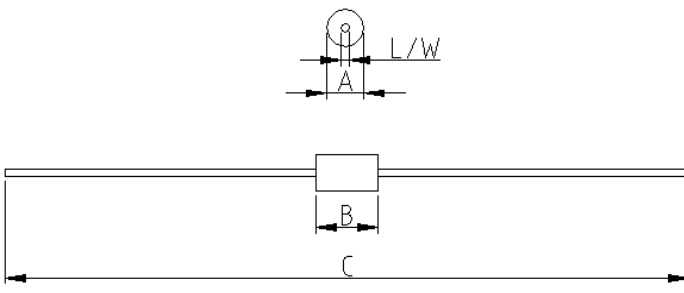
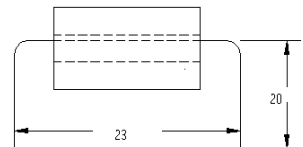


SPECIFICATION FOR APPROVAL

CUSTOMER:	Maritex PHP sp. Z o.o. sp.k	CUST.P/N:	EMIRHW35X6-K
ITEM:	K5B RH 3.5x6x0.8-S	K.C.P/N:	PS0306IL
<p>(1) SHAPE :</p> 		A	3.50±0.15 m/m
		B	6.0±0.3 m/m
		C	63.0±3.0 m/m
		D	m/m
		E	m/m
		F	m/m
		G	m/m
		(2) ELECTRICAL REQUIREMENTS:	<p>$Z_1 = 62 \text{ OHM AT } 25 \text{ MHz}$ $Z_2 = 105 \text{ OHM AT } 100 \text{ MHz}$</p>
<p>(4) PACKING</p> <p><input checked="" type="checkbox"/> IN BULK <input type="checkbox"/> VACUUM <input type="checkbox"/> INSERTION</p> <p>1000 PCS/BAGS* BAG/INNER BOX* BOXES/CARTON = PCS</p> <p>PCS/PLATE* PLATES/CARTON= PCS</p> <p>PCS/TRAY* TRAYS/CARTON= PCS</p>		<p>(3) TEST CONDITIONS:</p> <p>1 IMPEDANCE ANALYZE IHP4191A TEST FIXTURE: HP16092A</p> <p>2. WIRE: $\Phi 0.65$ T.C.W*63m/m1/2TS</p> <p>3. DRAWING:</p> 	
		<p>(5) APPEARANCE</p> <p>缺角 ≤ 端面1/3面積合格 深度 ≤ 壁厚1/2為合格</p>	
<p>(6) REMARK:</p>		Approved by 吳炳勳	
		Checked by 吳明珠	
		Drawn by 劉美鳳	
		DWG.NO. 20054001A	

TEST DATA

SPECIFICATION FOR APPROVAL

CUSTOMER				CUST. P/N	
ITEM	<i>K5B RH 3.5x6x0.8-S</i>			K.C. P/N	<i>PS0306IL</i>
TEMP	<i>24 °C</i>	RH	<i>69 %</i>	DWG.NO.	<i>20054001A</i>
	<i>0.65x63m/m</i>				
WIRE	<i>T.C.W</i>	WINDING	<i>1/2 Ts</i>	Q'TY	<i>5PCS</i>
Test Instruments					
Meas. It	<i>Z (OHM)</i>	<i>Z (OHM)</i>	<i>A m/m</i>	<i>B m/m</i>	
Spec./ Yours.					
Spec./Su	<i>40⁻⁰</i>	<i>60⁻⁰</i>	<i>3.50±0.15</i>	<i>6.0±0.3</i>	
Test Fre	<i>25 MHZ 100 MHZ</i>				
1	<i>62</i>	<i>105</i>	<i>3,45</i>	<i>6,04</i>	
2	<i>62</i>	<i>105</i>	<i>3,46</i>	<i>6,02</i>	
3	<i>61</i>	<i>104</i>	<i>3,46</i>	<i>6,07</i>	
4	<i>62</i>	<i>105</i>	<i>3,44</i>	<i>6,05</i>	
5	<i>62</i>	<i>105</i>	<i>3,45</i>	<i>6,08</i>	
6					
7					
8					
9					
#					
X	<i>62</i>	<i>105</i>	<i>3,45</i>	<i>6,05</i>	
R	<i>1</i>	<i>1</i>	<i>0,02</i>	<i>0,06</i>	
Your Sample.					
REMARK:				Approved by: <i>吴炳勳</i>	
				Checked by: <i>吴明珠</i>	
				Drawn by: <i>刘英凤</i>	