


PCB板安装孔图

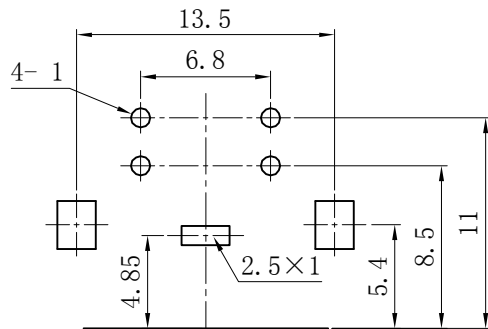

Specifications:

1. Working temperature
Environmental temperature: $-25 \sim +70^{\circ}\text{C}$
Relative humidity: 95% (40°C)
2. Rated load: 2A 12V AC
3. Contact resistance: $\leq 30\text{m}\Omega$
4. Insulation resistance: $\geq 100\text{M}\Omega$
5. Withstand Voltage: 250V AC (50Hz) 1min
6. Insertion force: 5~35N
7. Lifetime: ≥ 5000

7	Iron shell	1	Iron sheet =0.3mm	D. Cu/Sn			
6	Right middle pin	1	H62 Brass Y=0.2mm	D. Ni/Sn			
5	Left middle pin	1	H62 Brass Y=0.2mm	D. Ni/Sn			
4	Right long pin	1	H62 Brass Y=0.2mm	D. Ni/Sn			
3	Left long pin	1	H62 Brass Y=0.2mm	D. Ni/Sn			
2	Cover	1	PBT				
1	Base	1	PBT				
NO.	NAME	Q'TY	MATERIAL	FINISH	EACH WEIGHT	TOTAL WEIGHT	NOTE

A4				普通公差:	Conntherm							
A3				COMMON TOLERANCE :								
A2				X. XX	± 0.10	单位	mm	投影	品名	S端子	比例	1:1
A1				X. X	± 0.15	UNIT		PROJECTED	PRODUCT NAME		SCALE	
REV.	DATE	REVISION	DESCRIPTION	ISSUE	X	± 0.25	绘图	核对	型号			
					ANGULAR	$\pm 3^{\circ}$	日期	核准	图号			
							DATE	APPROVAL BY	DWG NO.			