


REVISONS					
REV	ZONE	DESCRIPTION	DATE	BY	APPR
01	--	--	18-July-11	--	--

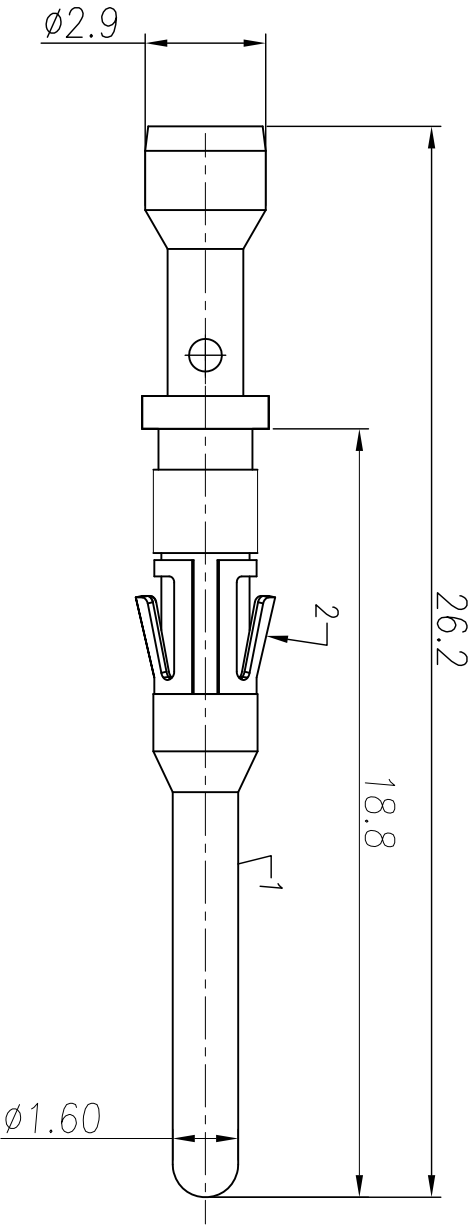

- General specification:
- 1.Suitable socket diameter:1.6mm(Size 16)
 - 2.Current rating:13A.
 - 3.Termination type:crimp
 - 4.Crimp wire range:20~22AWG
 - 5.Cable Strip Length:7mm
 - 6.Plating Specification:
 - 6.1.When XX=F Contact Plate Gold flash.
 - 6.2.WhenXX=G15 Contact Plate Gold 15u”.
 - 6.3.WhenXX=G30 Contact Plate Gold 30u”.
 - 7.Material Specification:See Below
 - 7.1.Contact Body:Brass.
 - 7.2.Metal Spring Clip:Beryllium Copper

UNLESS OTHERWISE SPECIFIED				MATERIAL SPECIFICATIONS:			
1) All dimensions are in metric(mm), Tolerances are as follows:				PROCESS SPECIFICATIONS:			
1 PL DEC +0.30 Fractions ±1/64				THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND DIMENSIONS ARE THE PROPERTY OF THE APPLICANT. REPRODUCTION OR RIGHTS OF MANUFACTURING VARIATIONS.			
2 PL DEC ±0.15 Angles ±1°				SINE Systems Corporation			
3 PL DEC ±0.10				A Subsidiary of Amphenol Corporation			
SIGNATURE				PIN CONTACT MACHINE SIZE 16.20-22AWG			
DATE				Dwg No			
DRAWN Brandon				MP20M23LXX			
CHECKED TOM				THIRD ANGLE PROJECTION			
18-July-11				TSM No			
ENGINEER				SIZE			
APPROVAL Linda				A4 MASS			
18-July-11				REV. 01			
CUSTOMER				SHEET 1 OF 1			
CUSTOMER				SHEET 1 OF 1			