LP-NSM150

Polymer PTC Devices

Surface mount fuses

Shanghai Wayon Thermo/Electro Materials Co.,Ltd.
16thFloor,JintaiTower,No.1398,JinqiaoRoad, Shanghai 200136,China
Tel: 86-21- 50758006 50310888 Fax: 86-21-50757680
E-mail: market@way-on.com ***Http://www.way-on.com***

Features

- ☐ Small size of 1206
- ☐ Lead-free and compliant with the European Union RoHS Directive 2002/95/EC
- ☐ Fast tripping resettable circuit protection
- ☐ Surface mount packaging for automated assembly
- ☐ Agency Recognition: UL、CSA

Product Dimensions (mm)

Part number	A	B	C	D	E	Part marking
	Max.	Max.	Max.	Min.	Min.	
LP-NSM150	3.50	1.80	1.80	0.10	0.20	N

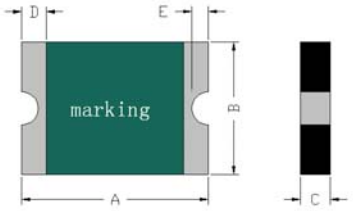

Top View Side View

Electrical Characteristics

Part number	I_H	I_T	V_{max}	I_{max}	T_{trip}		Pd_{typ}	R_{min}	R_{1max}
	(A)	(A)	(V)	(A)	Current(A)	Time(S)	(W)	(Ω)	(Ω)
LP-NSM150	1.50	3.00	6	40	8.0	1.00	0.6	0.04	0.12

I_H=Hold current: maximum current at which the device will not trip at 25℃ still air.
I_T=Trip current: minimum current at which the device will always trip at 25℃ still air.
V_{max}=Maximum voltage device can withstand without damage at rated current.
I_{max}=Maximum fault current device can withstand without damage at rated voltage.
T_{trip}=Maximum time to trip(s) at assigned current.
Pd_{typ}=Typical power dissipation: typical amount of power dissipated by the device when in state air environment.
R_{min}=Minimum device resistance at 25℃ prior to tripping.
R_{1max}=Maximum device resistance measured in the nontripped state 1 hour post reflow.

Solder Reflow Recommendations



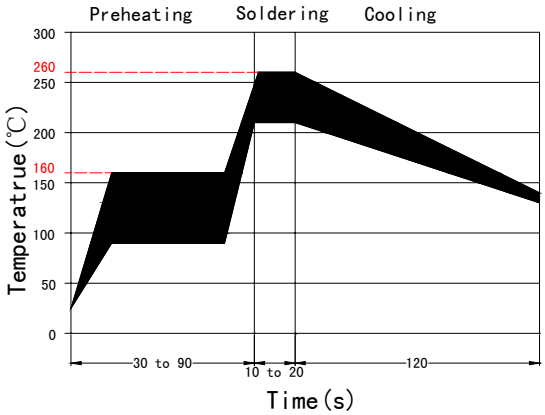

Solder Pad Layouts

Part number	A	B	C
	(mm)	(mm)	(mm)
LP-NSM150	1.80	1.00	1.80

* Recommended reflow methods: IR, Vapor phase, hot air oven.
* Devices can be cleaned using standard industry methods and solvents.

Notes:

- If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.
- Devices are not designed to be wave soldered to the bottom side of the board.

Package Information

Tape & Reel: 4000pcs per reel.

Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.
Caution: Operation beyond the rated voltage or current may result in rupture electrical arcing or flame.