

IFB112 NEW

Robust RISC-based DIN-rail Fanless Embedded System with i.MX 6UL Processor, 1 COM, 1 CAN Bus, 2 LANs and DIO (2-IN/1-OUT)

Features

- RISC-based (i.MX 6UltraLite) processor 528 MHz
- 256MB DDR3 SDRAM onboard
- 4GB eMMC flash onboard
- 1 Wireless (Wi-Fi or 3G/4G)
- 1 CAN Bus
- 2 digital inputs and 1 digital output
- 9 ~ 48 VDC wide range power input with terminal block
- Embedded Linux operating system (Yocto)
- Fanless design
- Wide operating temperature range from -40°C to +70°C




Introduction

The IFB112 cost-effective DIN-rail fanless embedded system utilizes the low power RISC-based (i.MX 6UL) processor and is designed to withstand temperatures ranging from -40°C to +70°C for using in extreme operating environment and industrial automation applications.

The IFB112 features one RS-232/422/485 serial ports, dual LAN, one CAN bus, two digital input channels, one digital output channel, LED for user programming and one eMMC onboard 4 GB. Two power paths input minimize the risk of data loss in the event of a single power failure. Its vertical DIN-rail form factor makes it easy to install the system in a small cabinet. The ready-to-run IFB112 is specially designed for remote control/monitoring management applications like unmanned control room, industrial machine, automatic parking lot, traffic cabinet and more.

Specifications


Construction	Extruded aluminum and heavy-duty steel, IP30	
CPU	Freescale .MX 6UL processor, ARM® Cortex®-A7, 528 MHz	
System Memory	1 x DDR3-1600 onboard, 256 MB	
System I/O Outlet	Serial Port	1 x RS-232/422/485 (RS-232/422/485 interface select by Software)
	CAN Bus	1 x CAN 2.0 B (DB9 connector) Meets ISO 11898 standard Software control termination resistor 120 ohm can high speed up to 1Mbit/s for transmit/receive
LAN	2 x 10/100 Mbps Ethernet Magnetic isolation protection 1.5KV	
Relay	1 x Relay	
USB	1 x USB 2.0	
DIO	1 x DIO (2-IN/1-OUT) DI: Wet/Dry DO: Wet DI: Input channels: 2 source type Input voltage: 0 to 24 VDC digital input levels for dry contacts: -Logic level 0: close to GND -Logic level 1: open Digital input levels for wet contacts : -Logic level 0: Close to GND -Logic level 1: +0.7 ~ +24 V max. DO: Output channels: 1, sink type Output current: max. 200 mA per channel On-state voltage: 24 VDC nominal, open	
	Console Port	Yes For user setting with debug
EEPROM	1 x EEPROM (2 Kb)	
Wireless	1 x PCI Express Mini Card socket 1 x SIM card socket	

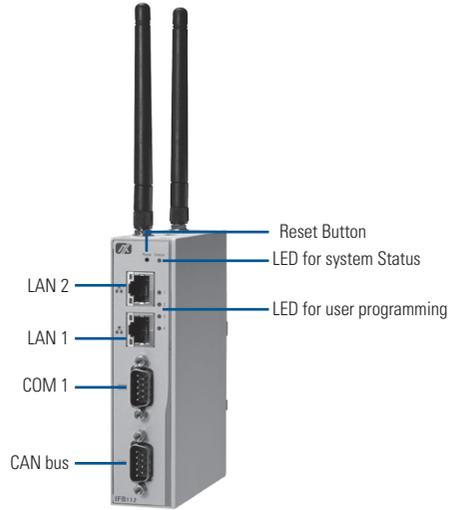


▲ Front view



▲ Rear view

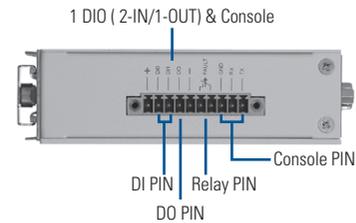

▲ Bottom



▲ Top view

Watchdog Timer	WDT 1: 0.5 to 128 seconds with a time resolution of 0.5 seconds
LEDs	1 x LED for power status 1 x LED for reset status 4 x LED (programming by client)
Storage	1 x eMMC 4GB flash onboard
Installation	DIN-rail
Power Supply	9 ~ 48VDC power input range
Operating Temperature	-40°C ~ +70°C (-40°F ~ +158°F)
Storage Temperature	-45°C ~ +85°C (-49°F ~ +185°F)
Humidity	10% ~ 95%
Vibration Endurance	5G @ 10 ~ 150MHz, amplitude 0.35ms
Dimensions	31 mm (1.22") (W) x 100 mm (3.94") (D) x 125 mm (4.92") (H)
Weight (net/gross)	0.3 kg (0.66 lb)/0.44 kg (0.97 lb)
Installation	DIN-rail, wall mounting
OS Linux	OS : Yocto 1.8.1 (Fido) Kernel: 3.14.52
Certificate	FCC Part 15 Heavy Industrial CE

Ordering Information

Standard

IFB112-FL-DC Robust DIN-rail fanless embedded system with i.MX 6UL processor, 1 COM, 1 CAN bus, 2 LANs and DIO (2-IN/1-OUT) (-40°C to +70°C)

Optional

Wall mount kit
Wireless (3G/GPS or Wi-Fi) module

Dimensions

