


# AX61120TP


1U Rackmount Chassis for full-size SBC



▲ Built-in a butterfly backplane with 2 expansion slots

## Features

- PICMG 1.3 SBC structure with 2 expansion slots
- Internal two 3.5" HDD drive bays
- Slim-line CD-ROM disk bay for ease of system installation
- Special cooling system design for supporting Intel® Pentium® 4 processor
- ATX 270W power supply (with PFC) for Intel® Pentium® 4 SBCs

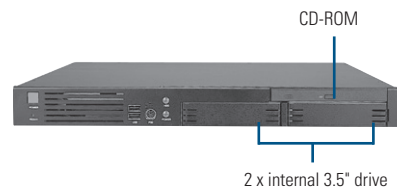

▲ Front view



▲ Rear view

## Specifications

Standard Color	Black
Construction	Heavy-duty steel
Drive Capacity	Exposed 1 x slim-line CD-ROM Internal 2 x 3.5" HDD drive bay
Cooling	3 x 4 cm ball bearing fan
Front Panel Indicators	1 x power on/off, 1 x HDD
Front Panel Controls	1 x power on/off and 1 x system reset
Front Panel Connectors	2 x USB, 1 x PS/2 6-pin
Pre-punched Panel	Rear 1 x 9-pin, 1 x 25-pin
System Board	Full-size SBCs

Expansion Interface	2 x PCI card (half-size)
Operating Temperature	0°C ~ +40°C (+32°F ~ +104°F)
Dimensions	482.6 mm (19") (W) x 500 mm (19.7") (D) x 44.3 mm (1.75") (H)
Weight (net/gross)	9.8 kg (21.6 lb)/10.5 kg (23.15 lb)

## Power Supply Specifications

Items	Watt	Input	Specifications	MTBF
			Output	
PS270-1U	ATX 270W (PFC)	AC 90-264V (Auto)	+5V @ 18A	100,000 hours
			+12V 1 @ 16A	
			+12V 2 @ 10A	
			+3.3V @ 16A	
			-12V @ 0.8A	
			+5VSB @ 2.5A	
PS200-1U	ATX 200W (PFC)	AC 90-264V (Auto)	+5V @ 17A	100,000 hours
			+12V 1 @ 6A	
			+12V 2 @ 12A	
			+3.3V @ 14A	
			-12V @ 0.8A	
			+5VSB @ 2A	

## Ordering Information

AX61120TP/X200	With ATX 200W power supply
AX61120TP/X270	With ATX 270W power supply

\*Specifications and certifications are based on options and may vary.

## Recommended SBC Selections

SBC81203 series w/ LGA775 heatsink  
 SBC81205 series w/ LGA775 heatsink  
 SBC81206 series w/ LGA775 heatsink  
 SHB100 series w/ LGA775 heatsink (manufacture option)  
 SHB103 w/ LGA1156 heatsink (manufacture option)  
 SHB110 series w/ LGA775 heatsink (manufacture option)  
 SHB106 series w/ LGA1156 heatsink (manufacture option)

## Backplane Options

### PICMG 1.0

Models	Slots per Segment (ISA/PCI/PCIe/CPU)	Segment
ATX6022/3VP2	0/2/0/1	Single

### PICMG 1.3

Models	Slots per Segment (ISA/PCI/PCIe/CPU)	Segment
FAB102	0/0/1/1	Single
FAB209	0/0/2/1	Single

## Dimensions

